

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

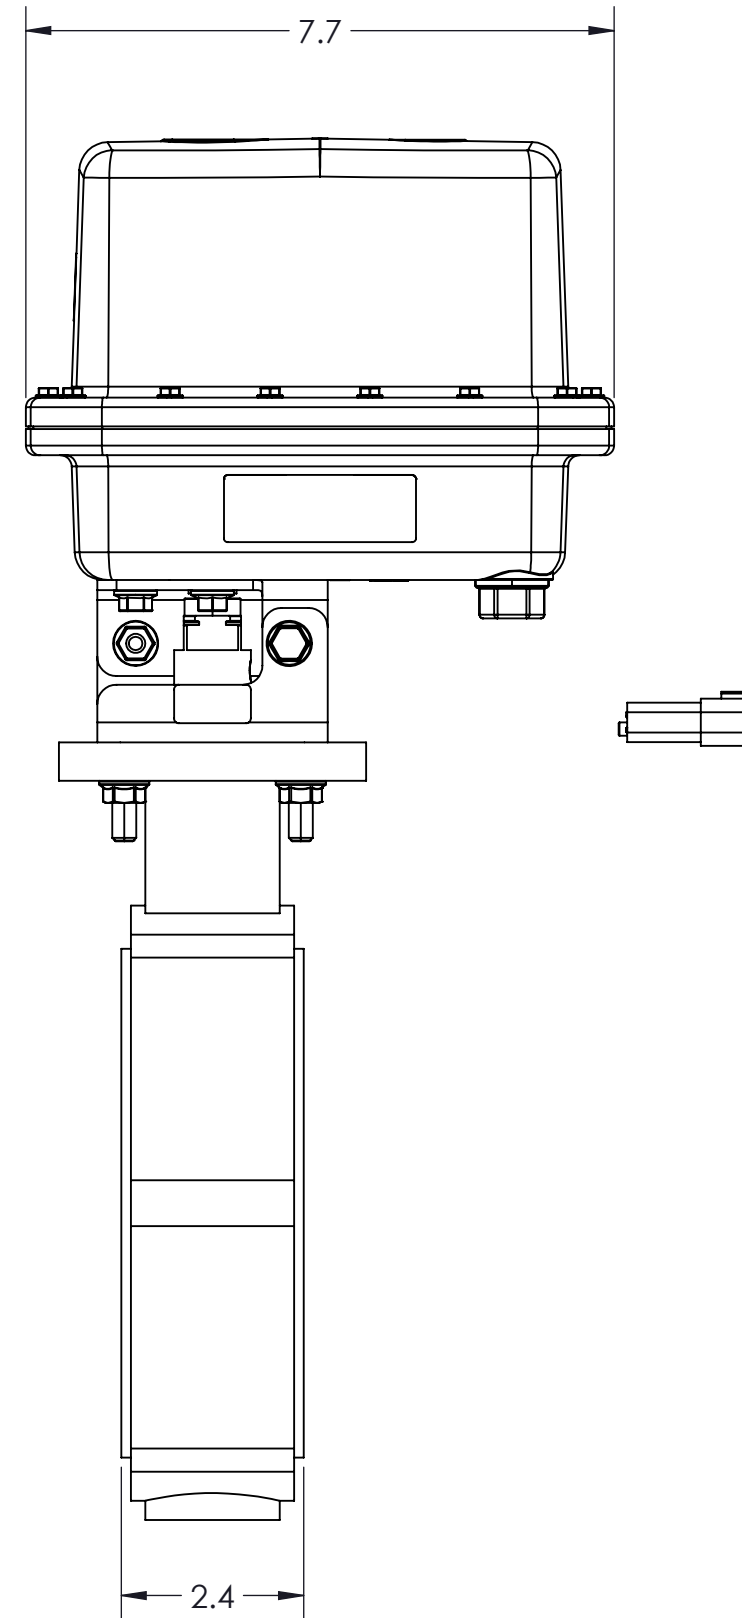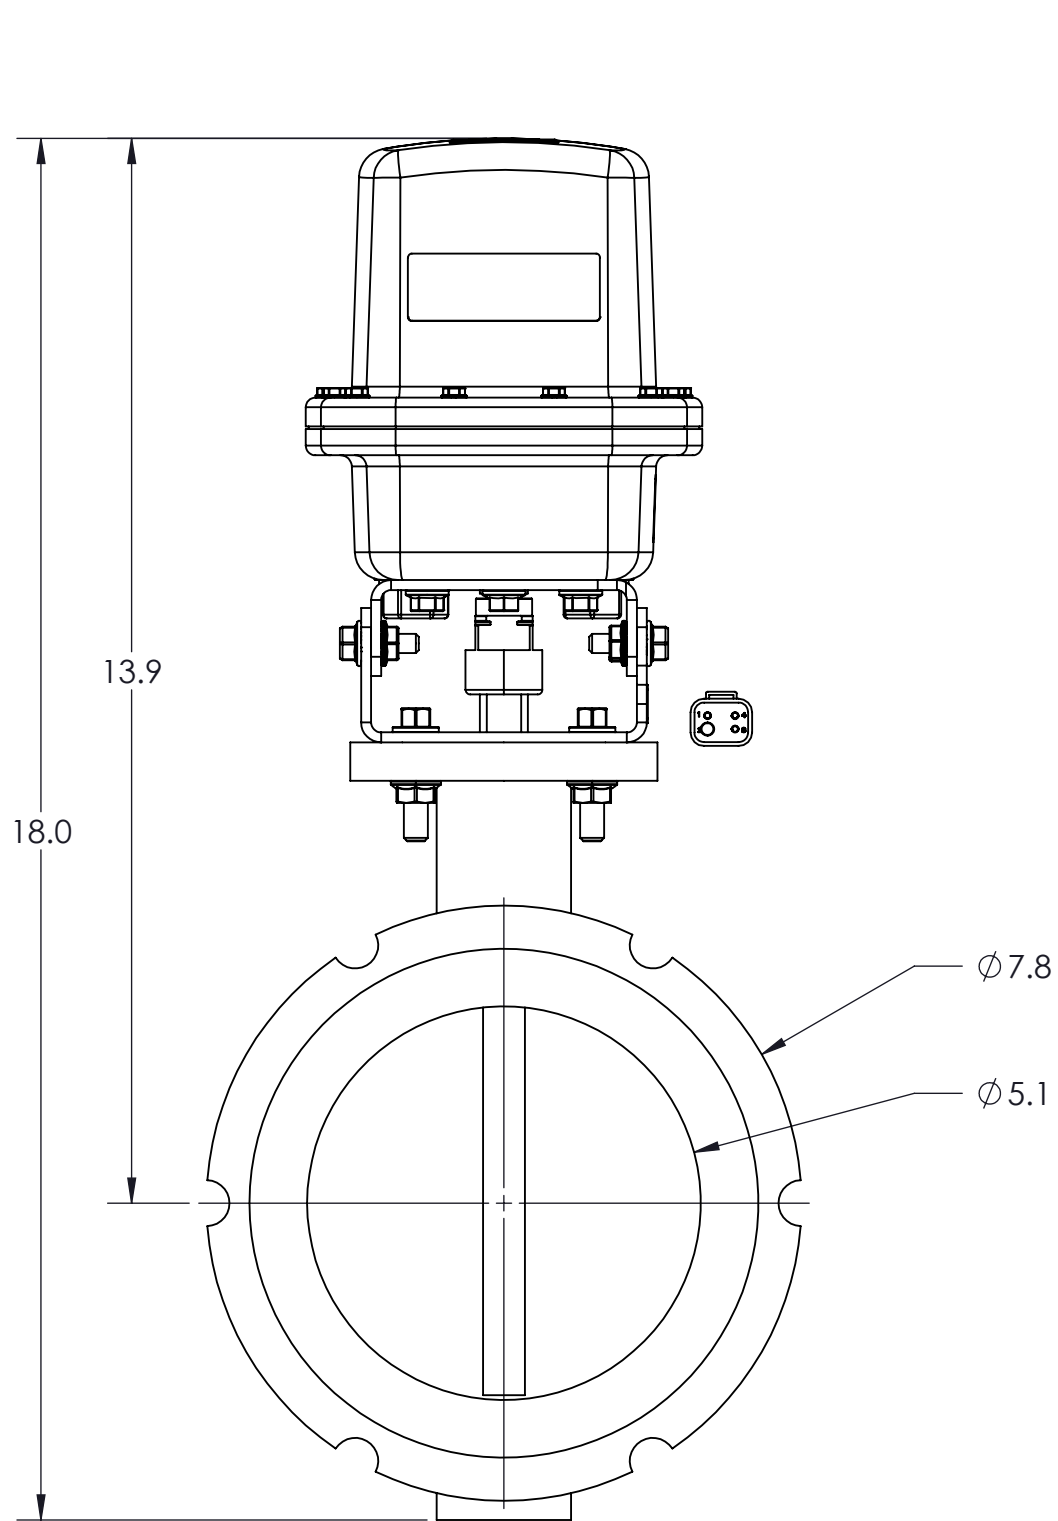

CONFORMS TO ASME STANDARDS Y14.5-2009

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]-	
.X±0.1	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 µIN
.XX±0.001	
.XXX±0.005	
.XX°±1°	
DENSITY: 2843.540 LBM/CU IN MASS: 391.625.974 LBM SURF AREA: 1029.817 SQ IN VOLUME: 137.725 CU IN	

DESIGNED BY: Larry Erdkamp
DRAWN BY: Jason Moran
APPROVED:
SCALE: 2:5
SIZE: B
MATERIAL: AS NOTED

		23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402	
		TITLE: ACTUATED VALVE, EH5, 5", ALUM BFLY, 2-WAY, 3S@12VDC ON/OFF	
PART NO: 59M35-10D50-DB1	REV: 1		
DRAWING NO: SALES_59M35-10D50-DB1	SHEET: 1 OF 2		

4

3

2

1