

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

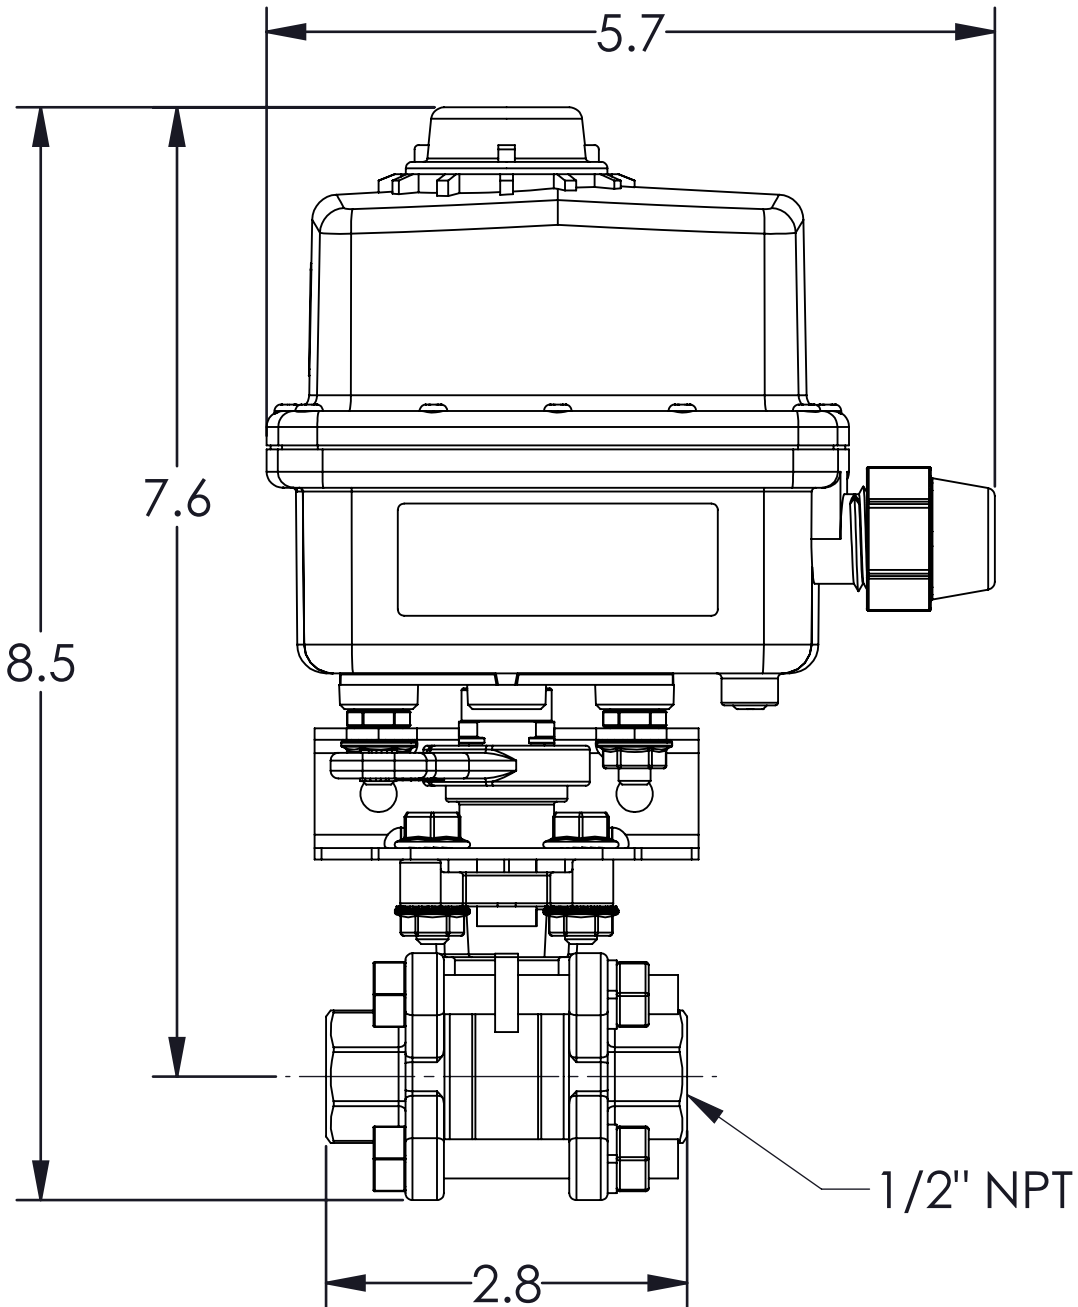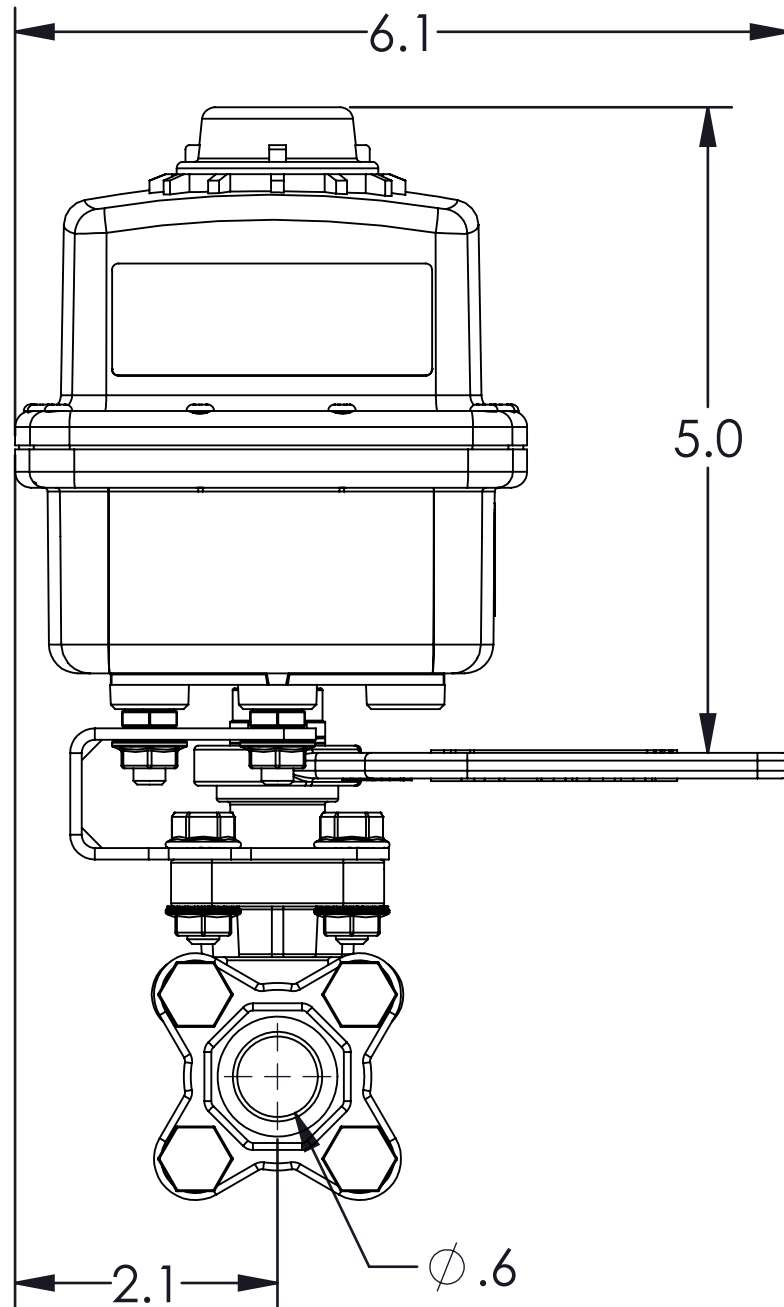

-STANDARD TOLERANCES-
-ALL DIMENSIONS IN INCHES [mm]-

.X±0.1
.XX±0.001
.XXX±0.005
.X°±1°

TOTAL RUNOUT: .005 FIM
CORNER BREAK: .001 / .010
SURFACE FINISH: 125 µIN

DENSITY: LBM/CU IN
MASS: LBM
SURF AREA: SQ IN
VOLUME: CU IN

DESIGNED BY: Lindsey Niemann
DRAWN BY: Aaron Goodwin
APPROVED:
SCALE: 2:3
SIZE: B
MATERIAL:

KZCO inc.

23860 KZ PARKWAY
GREENWOOD, NE 68366 USA
PHONE: +1.402.944.2767
FAX: +1.402.944.2402

TITLE: ACTUATED VALVE, EH3, 1/2", SS, 2-WAY, INLINE, W/HANDLE, ON/OFF, 0.8 S@12VDC, ANSI/NSF 61 CERTIFIED

PART NO: 61DG3-10D20-P01
DRAWING NO: SALES_61DG3-10D20-P01

REV: 1
SHEET: 1 OF 1

CONFORMS TO ASME STANDARDS Y14.5-2009

4

3

2

1

B

B

A

A