

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

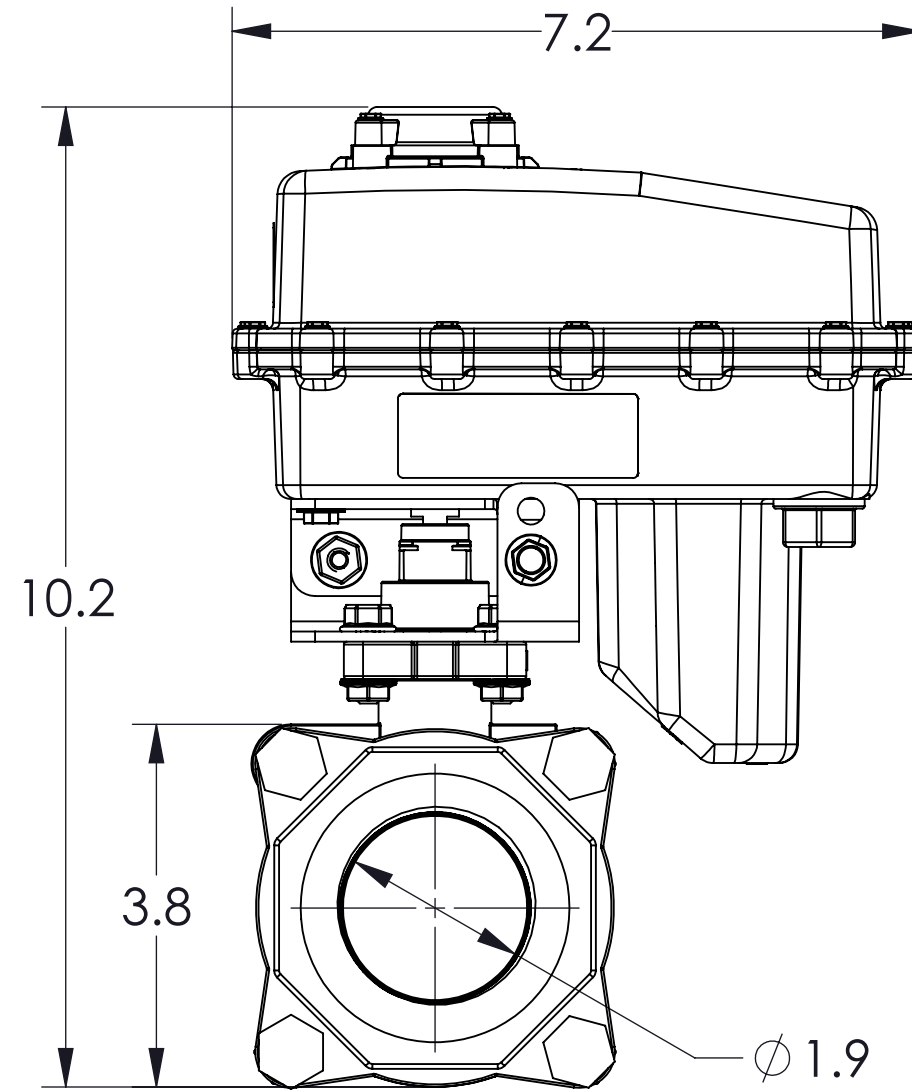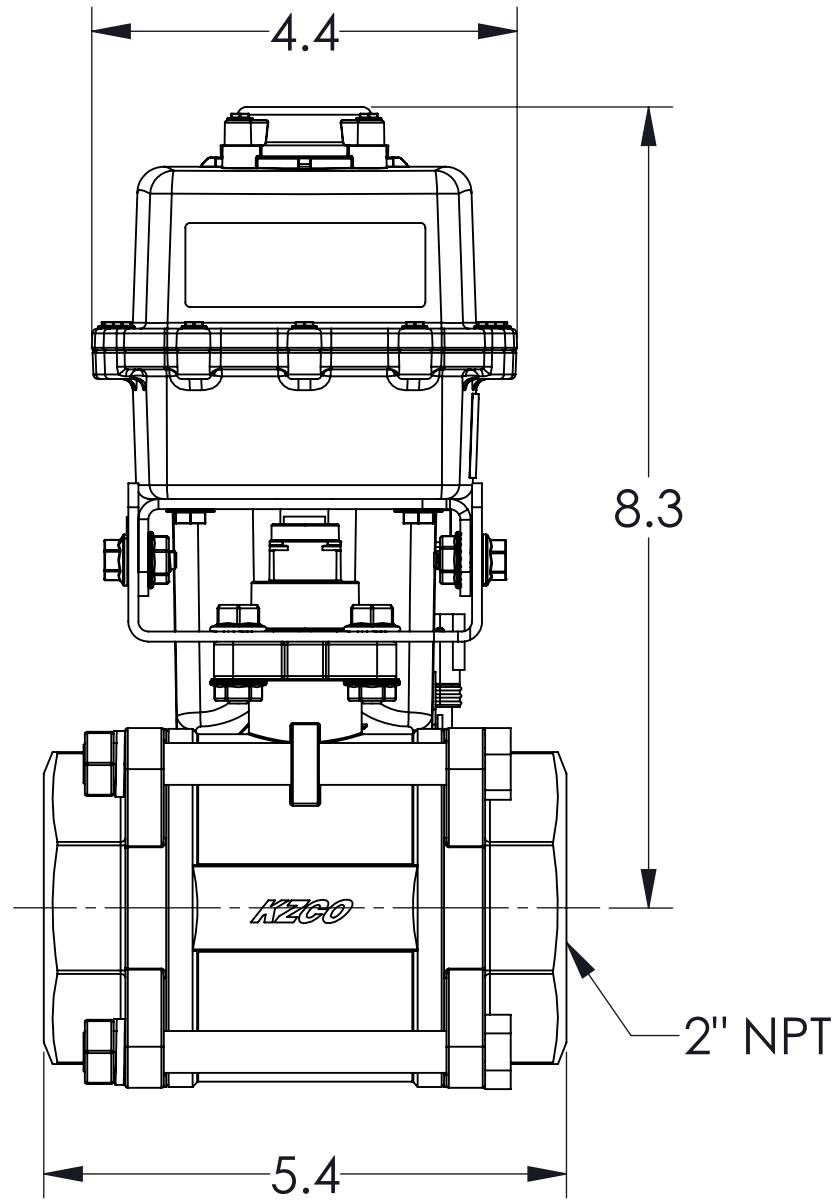

CONFORMS TO ASME STANDARDS Y14.5-2009

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]-	
.X±0.1	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 µIN
.XX±0.001	
.XXX±0.005	
.X°±1°	
DENSITY: 0.140 LBM/CU IN MASS: 12.288 LBM SURF AREA: 964.049 SQ IN VOLUME: 88.001 CU IN	

DESIGNED BY: Lindsey Niemann
DRAWN BY: Lindsey Niemann
APPROVED:
SCALE: 1:2
SIZE: B
MATERIAL: AS NOTED



23860 KZ PARKWAY
GREENWOOD, NE 68366 USA
PHONE: +1.402.944.2767
FAX: +1.402.944.2402

TITLE: ACTUATED VALVE, EH22, 2", SS, 3-PC, FP, OFFSET MTG, 3S@12VDC, 3ST WP3T, ANSI/NSF 61 CERT	
PART NO: 61122-10DW0-PF1	REV: 1
DRAWING NO: SALES_61122-10DW0-PF1	SHEET: 1 OF 1

4

3

2

1

B

B

A

A