


CUSTOMER REVISIONS			
REV	ECN	CHANGE	MODIFIED BY
1	24-0508	CREATED CUSTOMER PRINT	AUSTIN GEMAR


NOTES:

- PART NUMBER: 67G22-10DY0-CF1
- KZVALVE ACTUATOR SERIES: EH2
- ACTUATOR TIME: 1.5S @ 12 VDC
- AMBIENT OPERATING TEMP: -32°F TO 125°F (-36°C TO 52°C)
- AMBIENT STORAGE TEMP: -40°F TO 185°F (-40°C TO 85°C)
- ENCLOSURE RATING: IP68 PER ISO 20653
- UP TO 90 DEF OF TOTAL TRAVEL- ROTATION TO OPEN STATE IS CLOCKWISE WHEN VIEWED FROM THE BOTTOM SIDE
- VALVE: 1-1/4" 2-WAY REDUCED PORT, 1-1/4" FNPT CONNECTIONS
- WETTED MATERIALS: EPDM, 316SS, ME PTFE
- ELECTRICAL

- OPERATING INPUT VOLTAGE: 12VDC
- CURRENT DRAW
 - NORMAL OPERATION: 2 AMPS @ 12 VDC
 - CONTINUOS (RUNNING STATE): 0.4 AMPS @ 12 VDC
 - STALL (LOCKED ROTOR): 9.5 AMPS @ 12 VDC
- CONNECTION: 4-PIN RECEPTACLE
 - CONXALL 4-PIN
 - TERMINAL MATERIAL: GOLD OVER NICKEL-PLATED BRASS
- PINOUT/FUNCTION
 - PIN 1 (RED) - POWER IN (+)
 - PIN 2 (WHITE) - POWER IN (-)
 - PIN 3 (BLACK) - SIG 1 (+) TO OPEN
 - PIN 4 (GREEN) - NONE

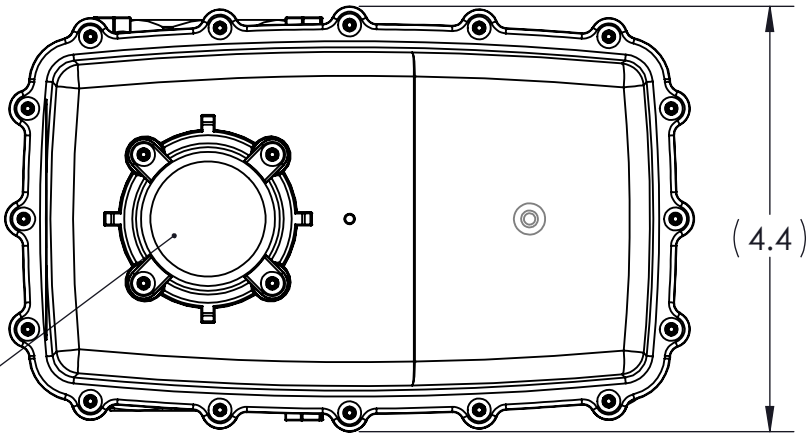

LENS
LOCATION

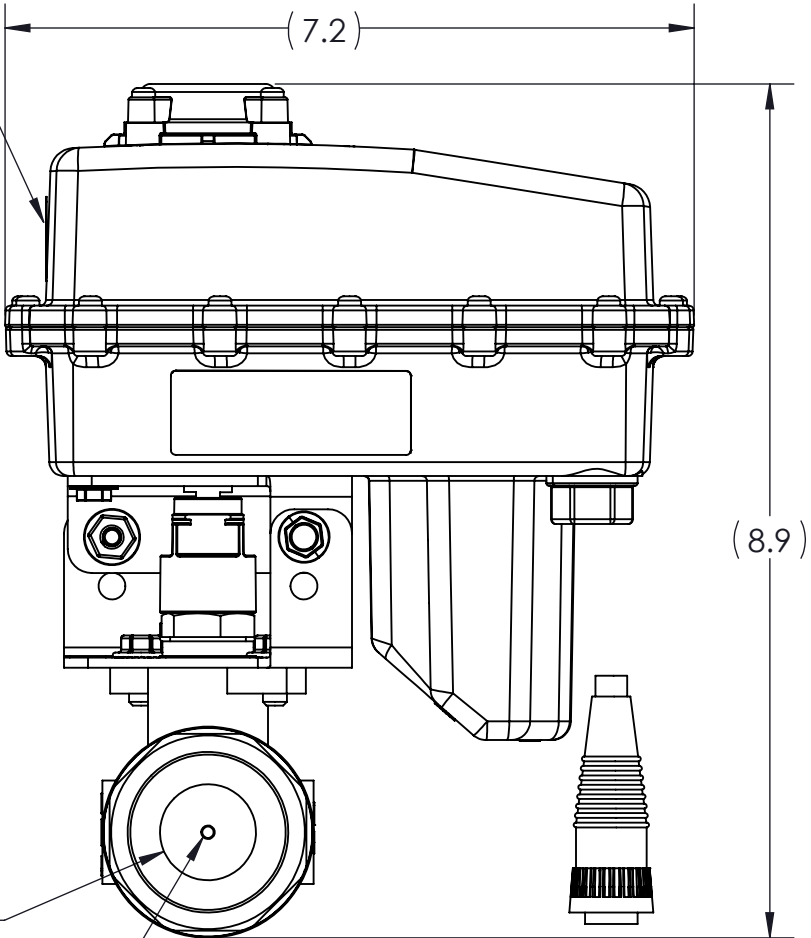

LABEL
LOCATION

(Ø 1.00)

VENT PORT

FLOW DIRECTION

CONFORMS TO ASME
STANDARDS Y14.5-2009
DENSITY: 0.064 LBM/CU IN
MASS: 3.316 LBM
SURF AREA: 682.531 SQ IN
VOLUME: 51.623 CU IN

DESIGNED BY: Lindsey Niemann
DRAWN BY: Lindsey Niemann
APPROVED:
SCALE: 1:4
SIZE: B
MATERIAL: AS NOTED

KZVALVE

23860 KZ PARKWAY
GREENWOOD, NE 68366 USA
PHONE: +1.402.944.2767
FAX: +1.402.944.2402

TITLE: ACTUATED VALVE, EH22, 1-1/4" 2-PC SS VENTED,
1.5S@12VDC, CONXALL

PART NO: 67G22-10DY0-CF1

REV: 1

DRAWING NO: 67G22-10DY0-CF1

SHEET: 3 OF 3