

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

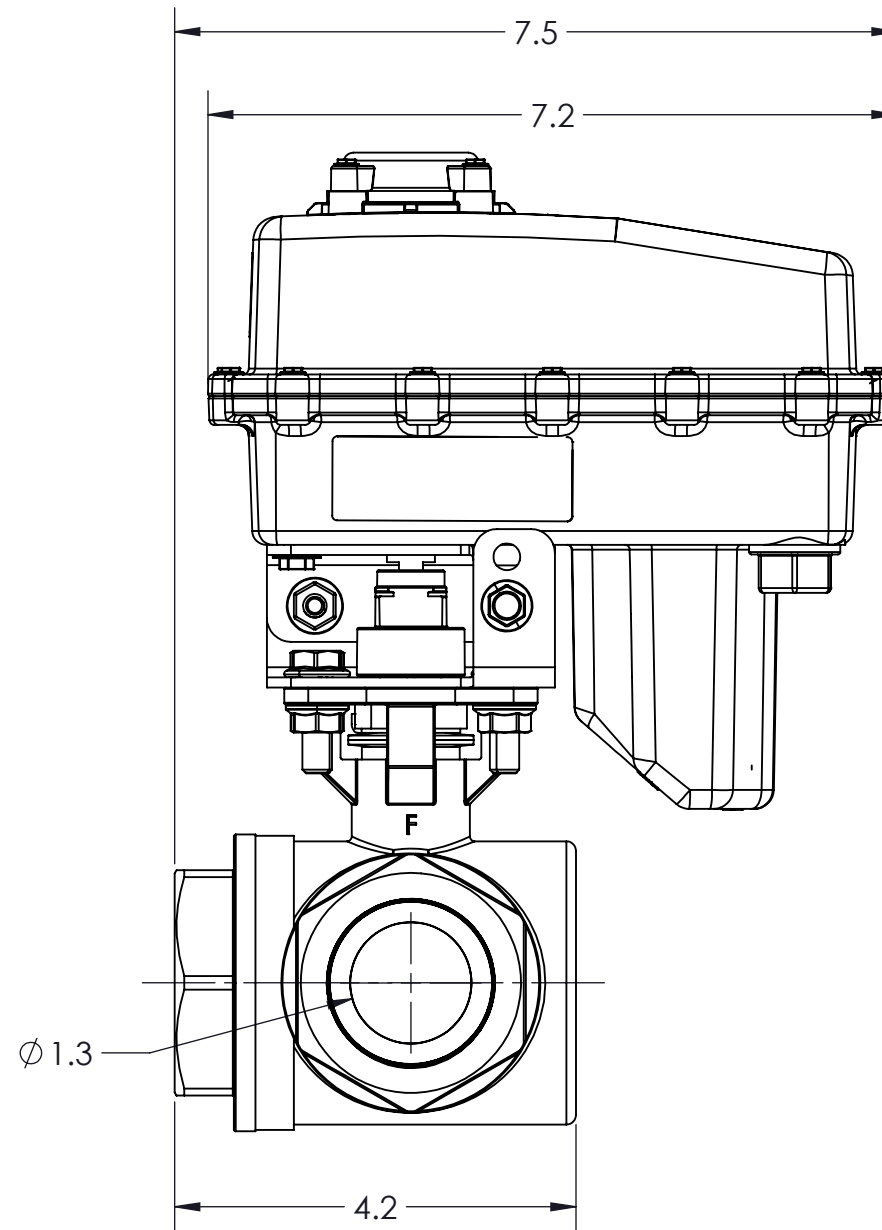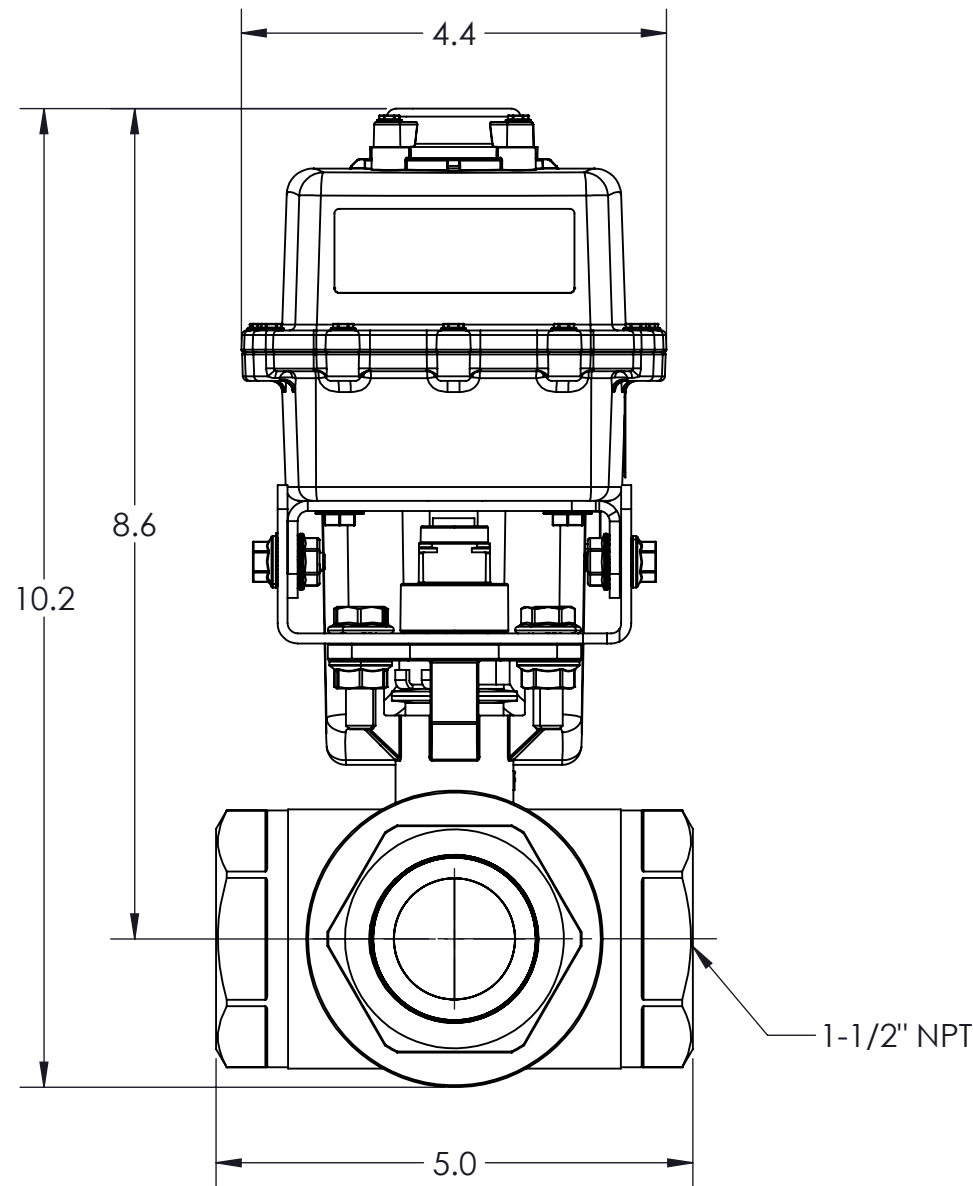

CONFORMS TO ASME STANDARDS Y14.5-2009

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]-	
.X±0.1	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 µIN
.XX±0.001	
.XXX±0.005	
.XX°±1°	
DENSITY: 0.180 LBM/CU IN MASS: 13.341 LBM SURF AREA: 874.031 SQ IN VOLUME: 74.266 CU IN	

DESIGNED BY: Lindsey Niemann
DRAWN BY: Aaron Goodwin
APPROVED:
SCALE: 1:2
SIZE: B
MATERIAL: AS NOTED

		<small>23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402</small>
TITLE: ACTUATED VALVE, EH22, 1-1/2", SS, 3-WAY, OFFSET MTG, ON/OFF, 3 SEC @ 12VDC, 3ST WP3T		
PART NO: 73H22-10DW0-P31	REV: 1	
DRAWING NO: SALES_73H22-10DW0-P31	SHEET: 1 OF 1	

4

3

2

1