

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

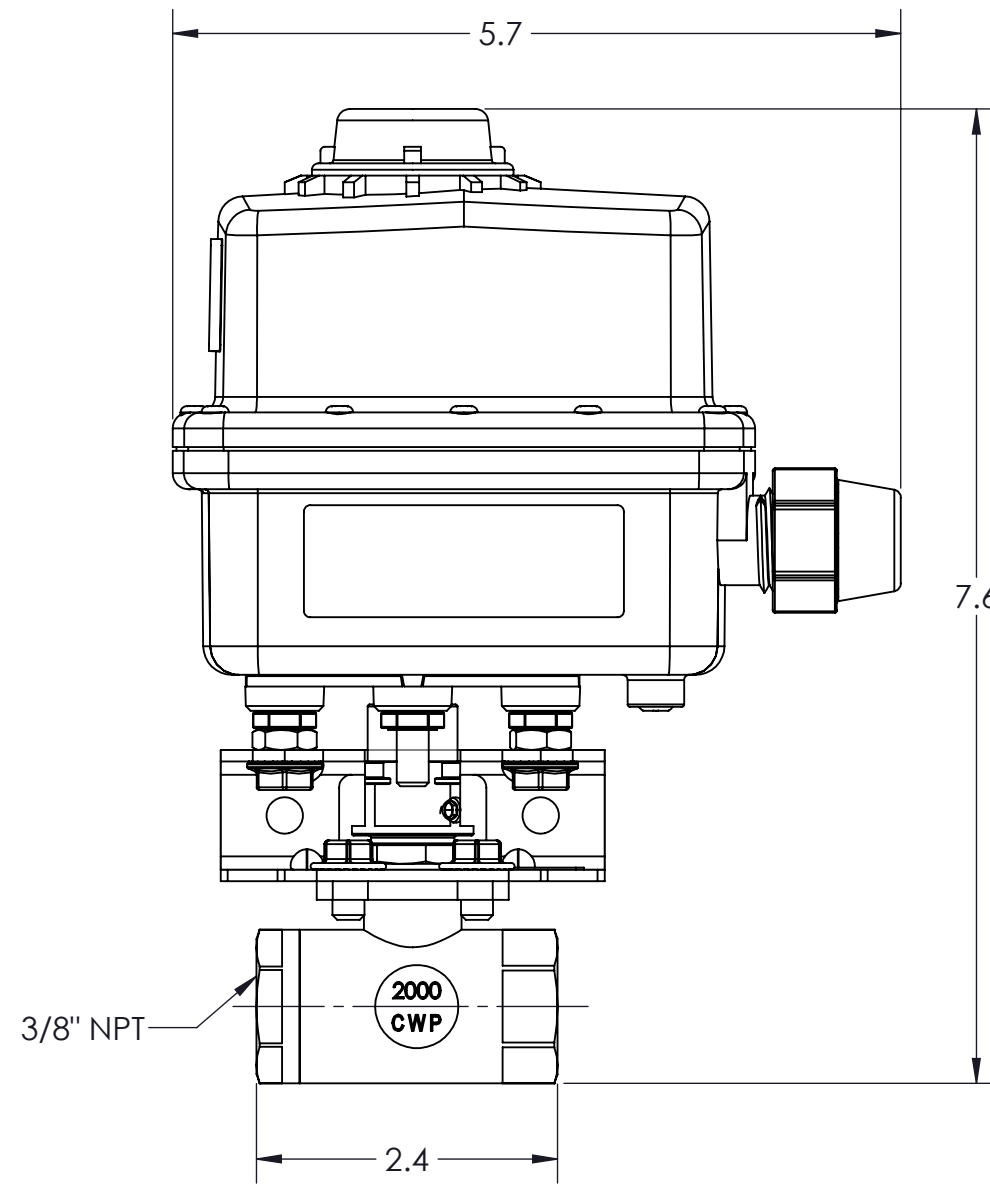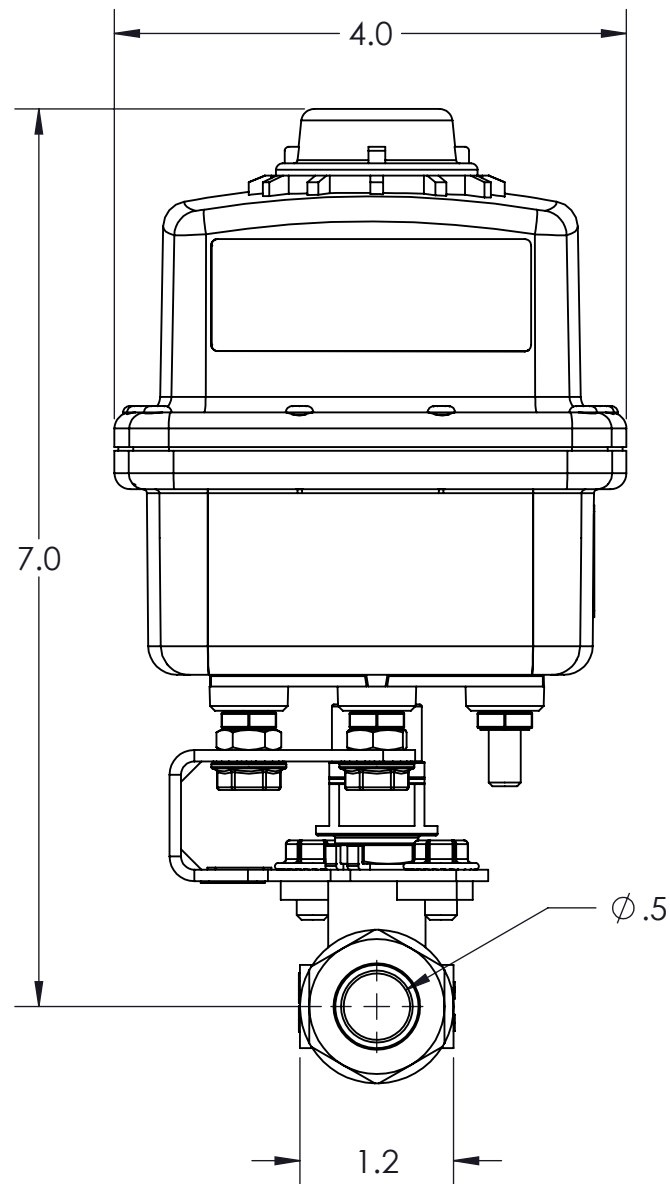

|   |  |
|---|--|
| -STANDARD TOLERANCES-<br>-ALL DIMENSIONS IN INCHES [mm]-  |  |
| .X±0.1  | TOTAL RUNOUT: .005 FIM<br>CORNER BREAK: .001/.010<br>SURFACE FINISH: 125 µIN |
| .XX±0.001   |  |
| .XXX±0.005  |  |
| .XX°±1°   |  |
|   |  |
| DENSITY: 0.079 LBM/CU IN<br>MASS: 2.331 LBM<br>SURF AREA: 453.580 SQ IN<br>VOLUME: 29.534 CU IN |  |

|                            |
|----------------------------|
| DESIGNED BY: Tanner Buresh |
| DRAWN BY: Aaron Goodwin    |
| APPROVED:                  |
| SCALE: 2:3                 |
| SIZE: B                    |
| MATERIAL: AS NOTED         |

|  |               |
|--|---------------|
|  |               |
| TITLE: ACTUATED VALVE, EH3, 3/8", SS 2-WAY, INLINE<br>MTG, ON/OFF, 0.8 SEC @ 12VDC, 3ST WP3T |               |
| PART NO: 88C33-10D20-P01   | REV: 1        |
| DRAWING NO: SALES_88C33-10D20-P01  | SHEET: 1 OF 1 |

CONFORMS TO ASME STANDARDS Y14.5-2009

23860 KZ PARKWAY  
GREENWOOD, NE 68366 USA  
PHONE: +1.402.944.2767  
FAX: +1.402.944.2402

4

3

2

1