

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

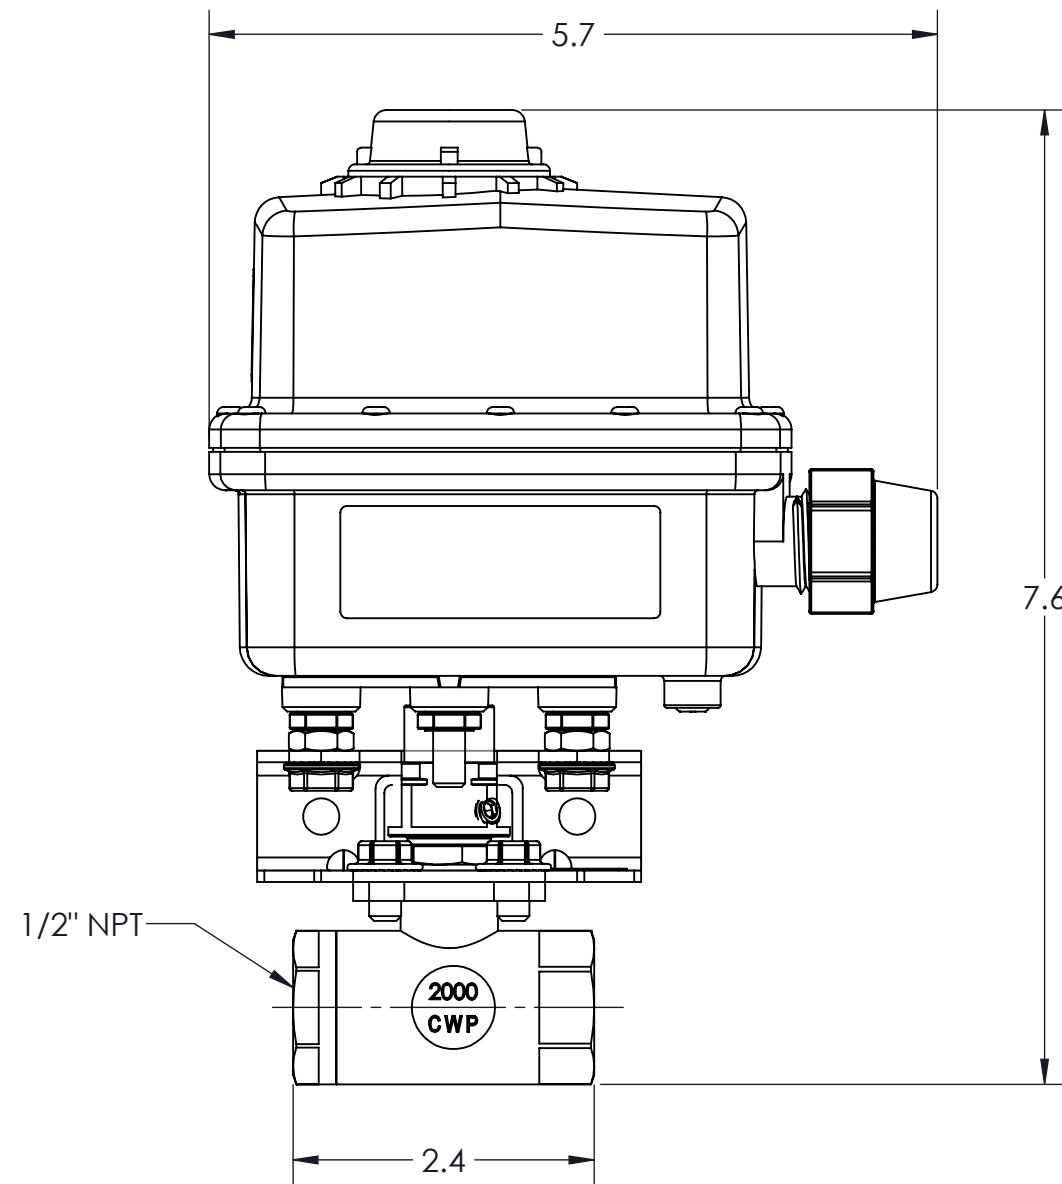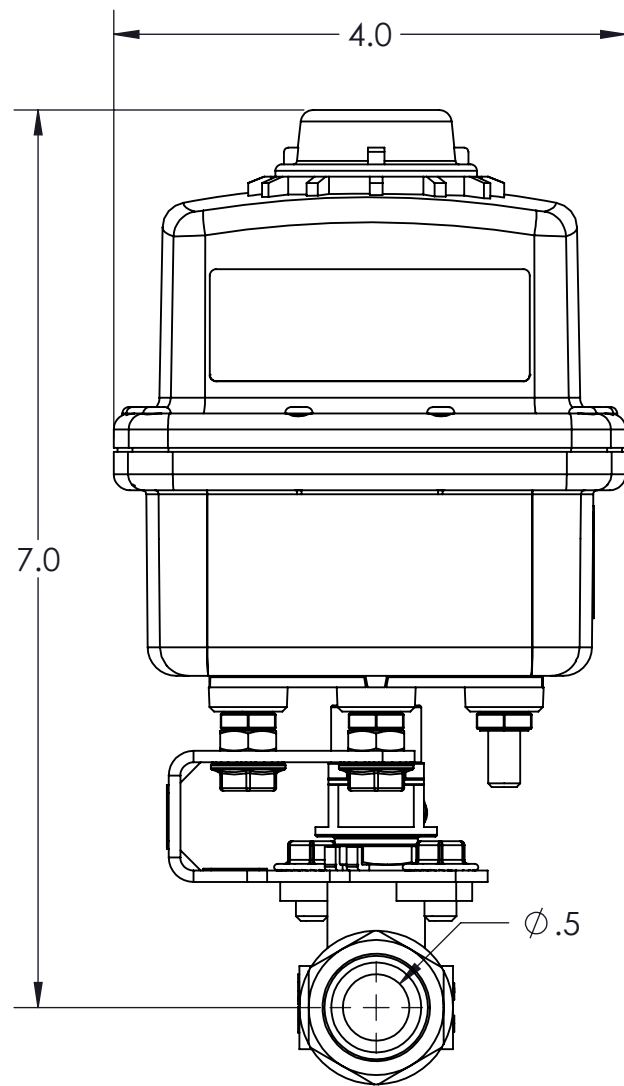

CONFORMS TO ASME STANDARDS Y14.5-2009

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]-	
.X±0.1	TOTAL RUNOUT: .005 FIM
.XX±0.001	CORNER BREAK: .001/.010
.XXX±0.005	SURFACE FINISH: 125 µIN
.XX°±1°	
DENSITY: 0.079 LBM/CU IN MASS: 2.321 LBM SURF AREA: 453.839 SQ IN VOLUME: 29.249 CU IN	

DESIGNED BY: Larry Erdkamp
DRAWN BY: Aaron Goodwin
APPROVED:
SCALE: 2:3
SIZE: B
MATERIAL: Material <not specified>

		23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402
TITLE: ACTUATED VALVE, EH3, 1/2" SS 2-WAY, ON/OFF, 0.8 SEC @ 12VDC, 3ST WP3T		
PART NO: 88D33-10D20-P01	REV: 1	
DRAWING NO: SALES_88D33-10D20-P01	SHEET: 1 OF 1	

4

3

2

1