

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

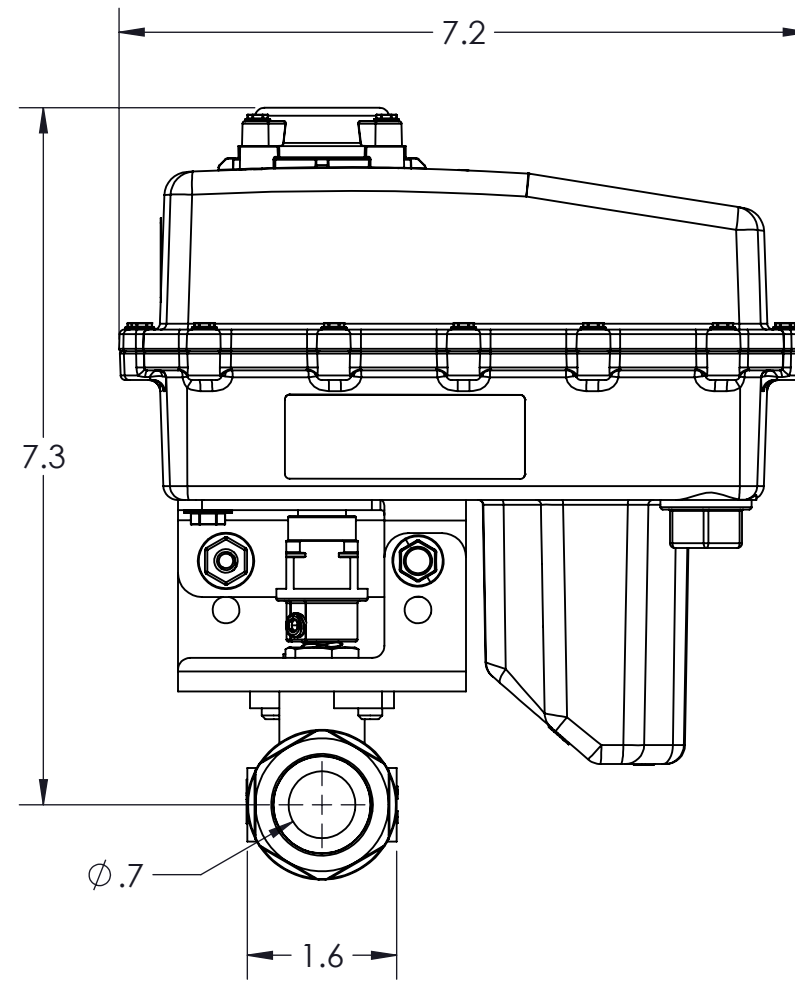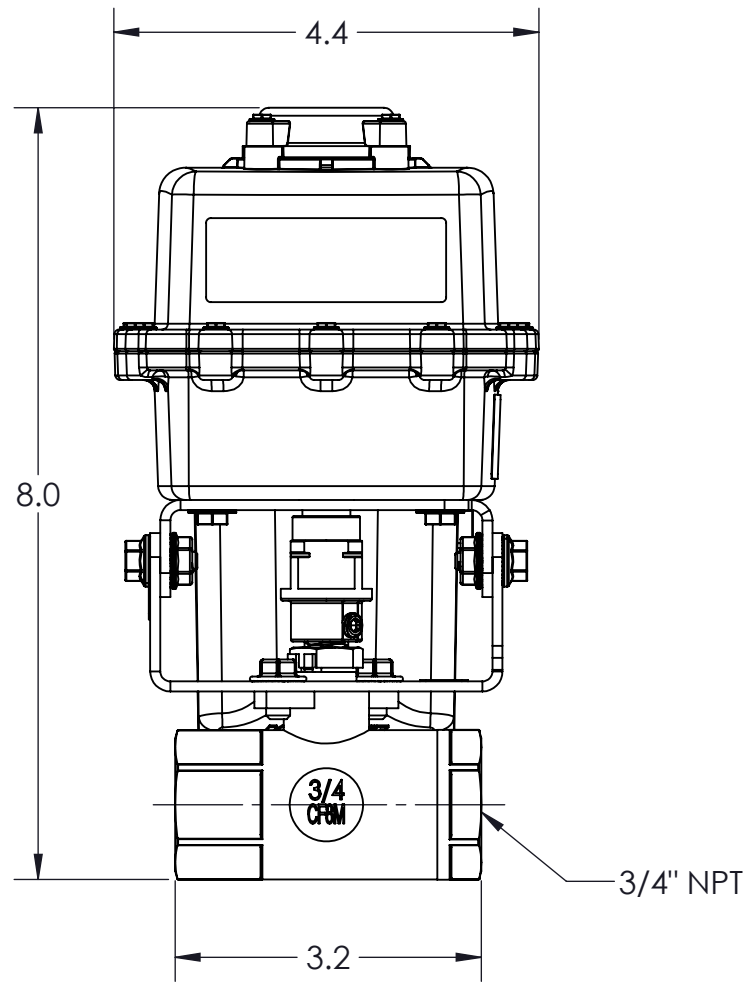

CONFORMS TO ASME STANDARDS Y14.5-2009

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]-	
.X±0.1	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 µIN
.XX±0.001	
.XXX±0.005	
.X°±1°	
DENSITY: 0.064 LBM/CU IN MASS: 2.953 LBM SURF AREA: 631.502 SQ IN VOLUME: 45.934 CU IN	

DESIGNED BY: Larry Erdkamp
DRAWN BY: Jason Moran
APPROVED:
SCALE: 1:2
SIZE: B
MATERIAL: AS NOTED

<small>23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402</small>	
TITLE: ACTUATED VALVE, EH22, 3/4" SS 2-WAY OFFSET MTG, ON/OFF, 1.5 SEC @ 12 VDC, 3ST WP3T	
PART NO: 88E22-10DY0-PF1	REV: 1
DRAWING NO: SALES_88E22-10DY0-PF1	SHEET: 1 OF 1

4

3

2

1

B

B

A

A