

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

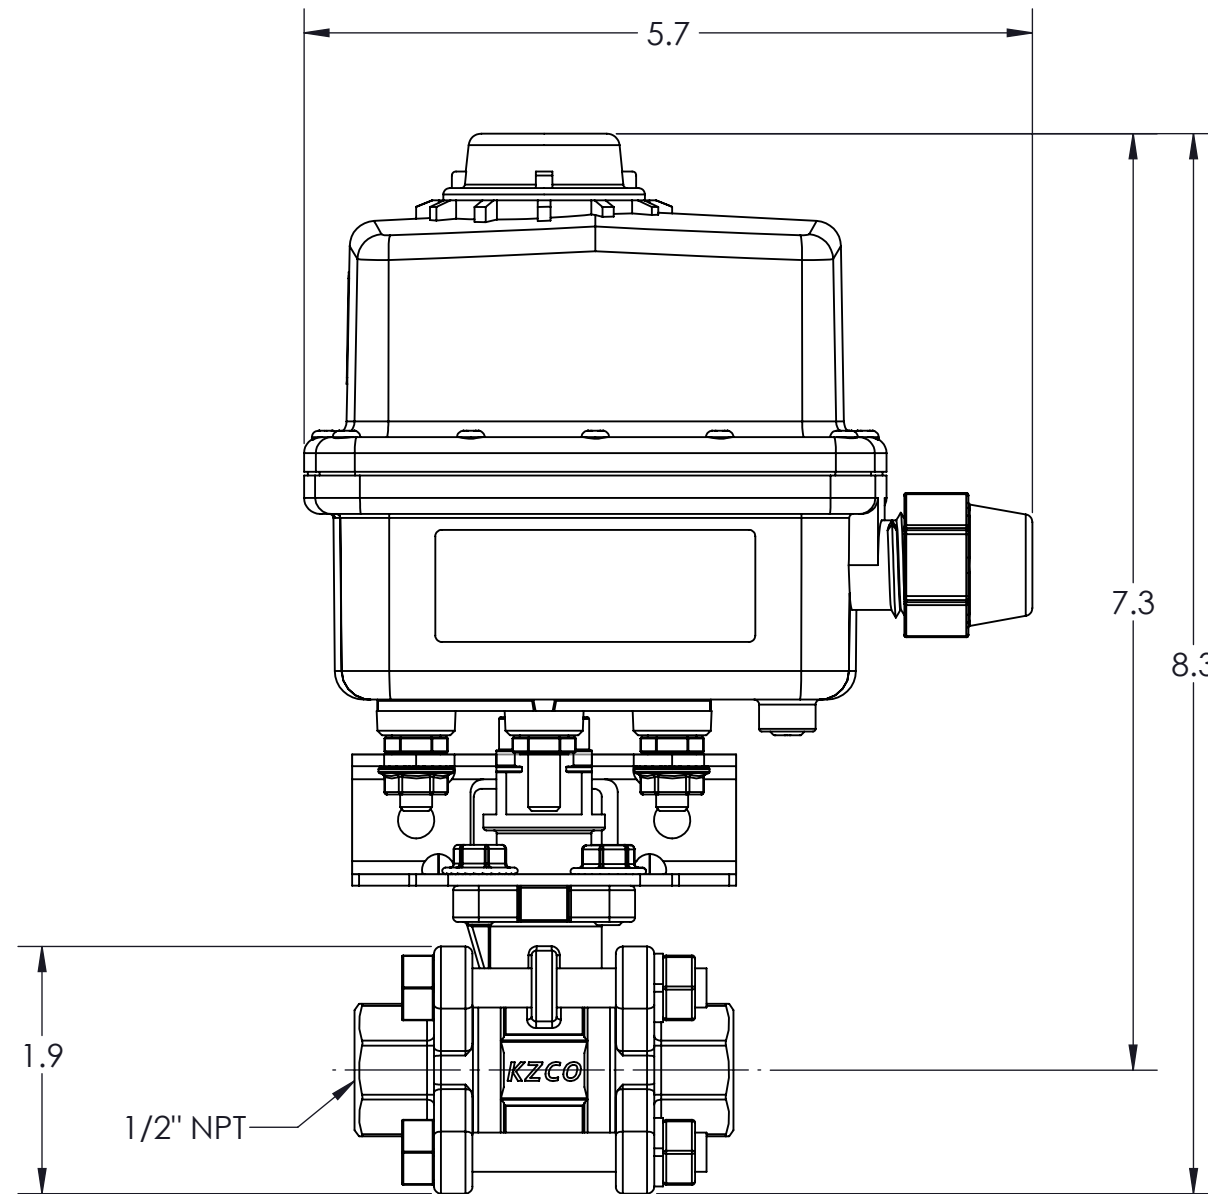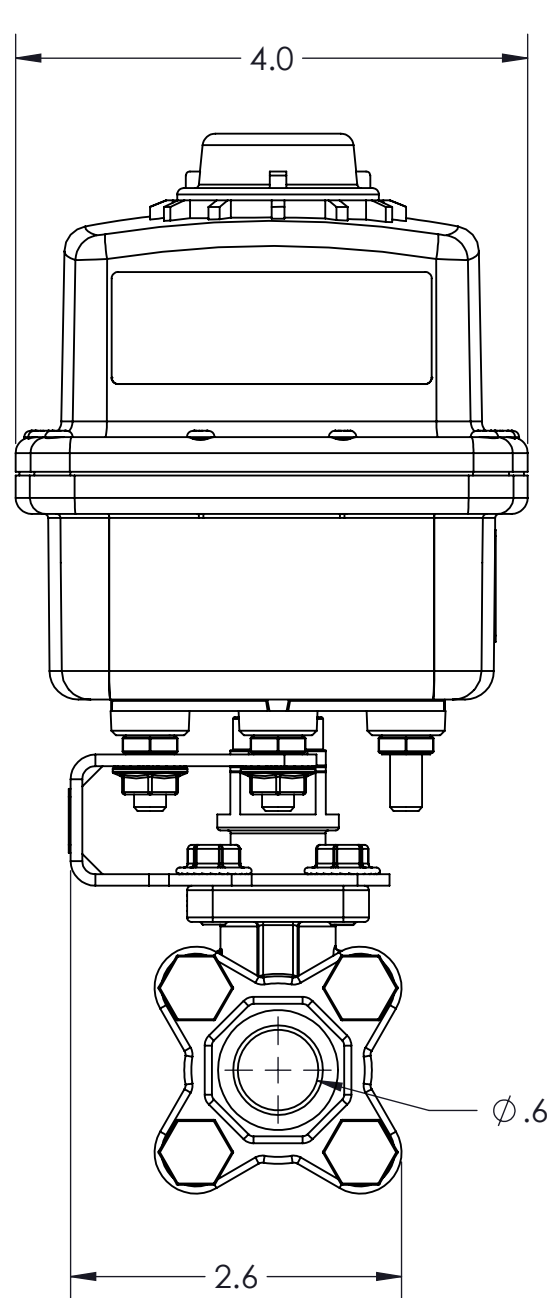

CONFORMS TO ASME STANDARDS Y14.5-2009

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]-	
.X±0.1	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001 / .010 SURFACE FINISH: 125 µIN
.XX±0.001	
.XXX±0.005	
.X°±1°	
DENSITY: 0.223 LBM/CU IN MASS: 7.219 LBM SURF AREA: 488.763 SQ IN VOLUME: 32.435 CU IN	

DESIGNED BY: Brian Pham  
 DRAWN BY: Aaron Goodwin  
 APPROVED:  
 SCALE: 2:3  
 SIZE: B  
 MATERIAL: AS NOTED



23860 KZ PARKWAY  
 GREENWOOD, NE 68366 USA  
 PHONE: +1.402.944.2767  
 FAX: +1.402.944.2402

TITLE: ACTUATED VALVE, EH3, 1/2", SS 3-PC, 2-WAY,  
 INLINE MTG, ON/OFF, 0.8 SEC@12VDC, 3ST WP3T

PART NO: 89D33-10D20-P01  
 DRAWING NO: SALES\_89D33-10D20-P01  
 REV: 1  
 SHEET: 1 OF 1

4

3

2

1