

4



3


2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

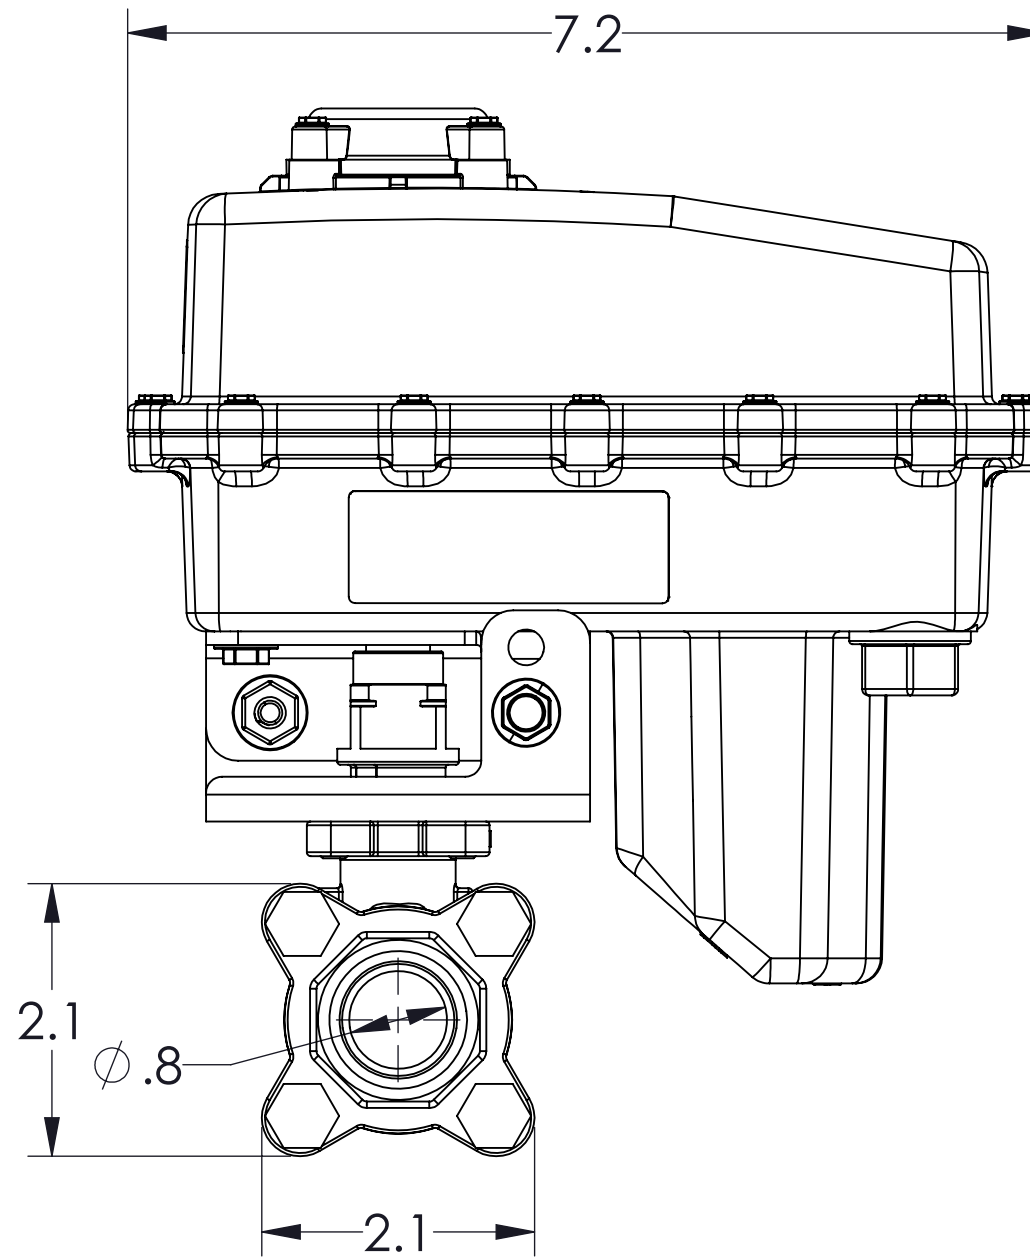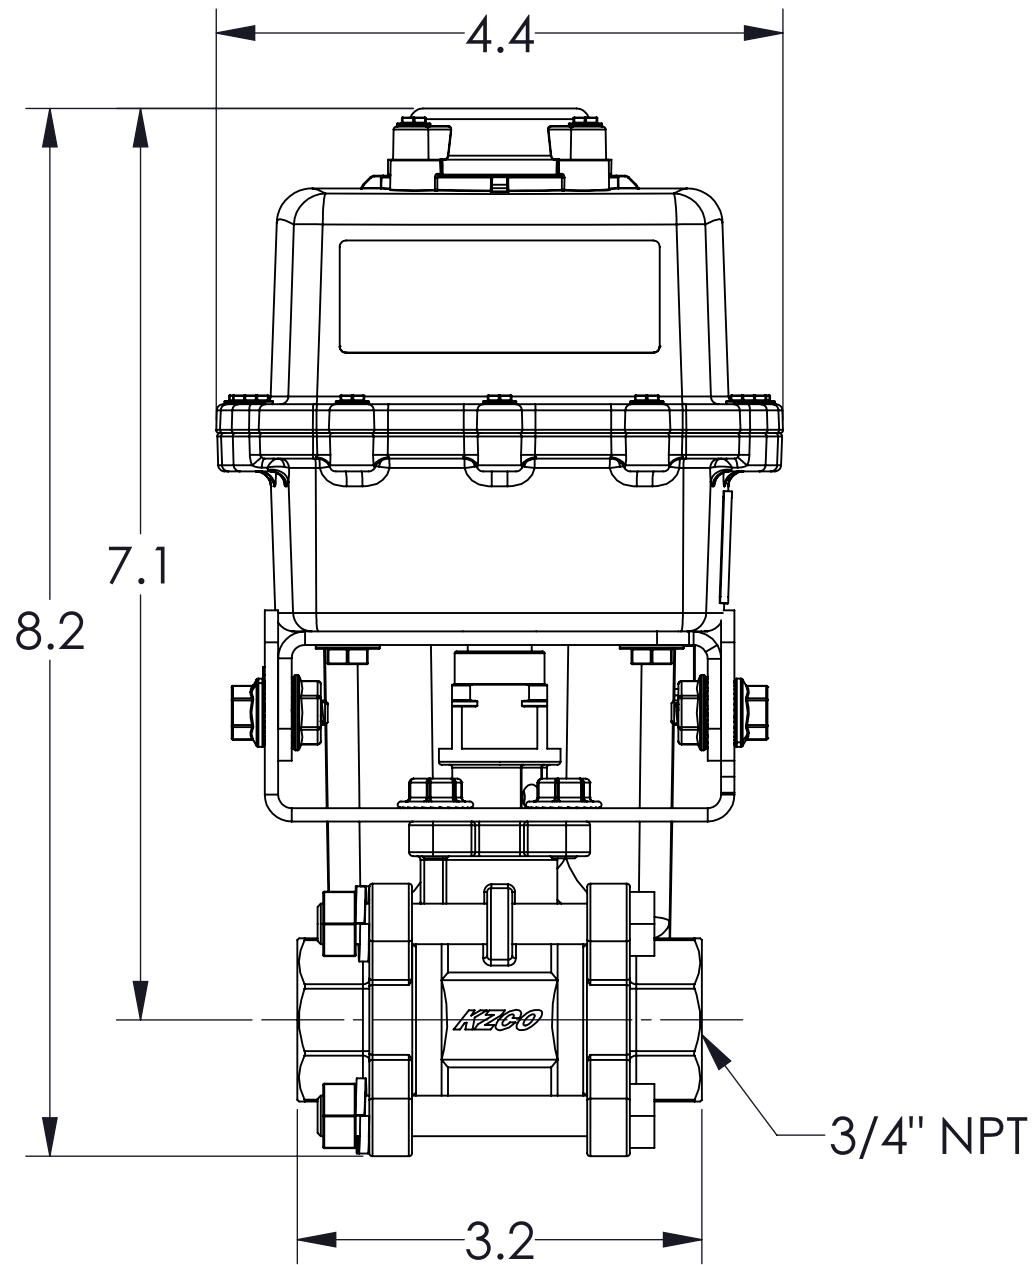

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]-	
.X±0.1	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 µIN
.XX±0.001	
.XXX±0.005	
.XX°±1°	
	
DENSITY: 0.068 LBM/CU IN MASS: 3.299 LBM SURF AREA: 661.115 SQ IN VOLUME: 48.417 CU IN	

DESIGNED BY: Brian Pham
 DRAWN BY: Aaron Goodwin
 APPROVED:
 SCALE: 2:3
 SIZE: B
 MATERIAL: AS NOTED



23860 KZ PARKWAY
 GREENWOOD, NE 68366 USA
 PHONE: +1.402.944.2767
 FAX: +1.402.944.2402

TITLE: ACTUATED VALVE, EH22, 3/4" SS 3-PC, 2-WAY, OFFSET, ON/OFF, 1.5S@12VDC

PART NO: 89E22-10DY0-PF1
 REV: 1
 DRAWING NO: SALES_89E22-10DY0-PF1
 SHEET: 1 OF 1

CONFORMS TO ASME
 STANDARDS Y14.5-2009

4

3

2

1