

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

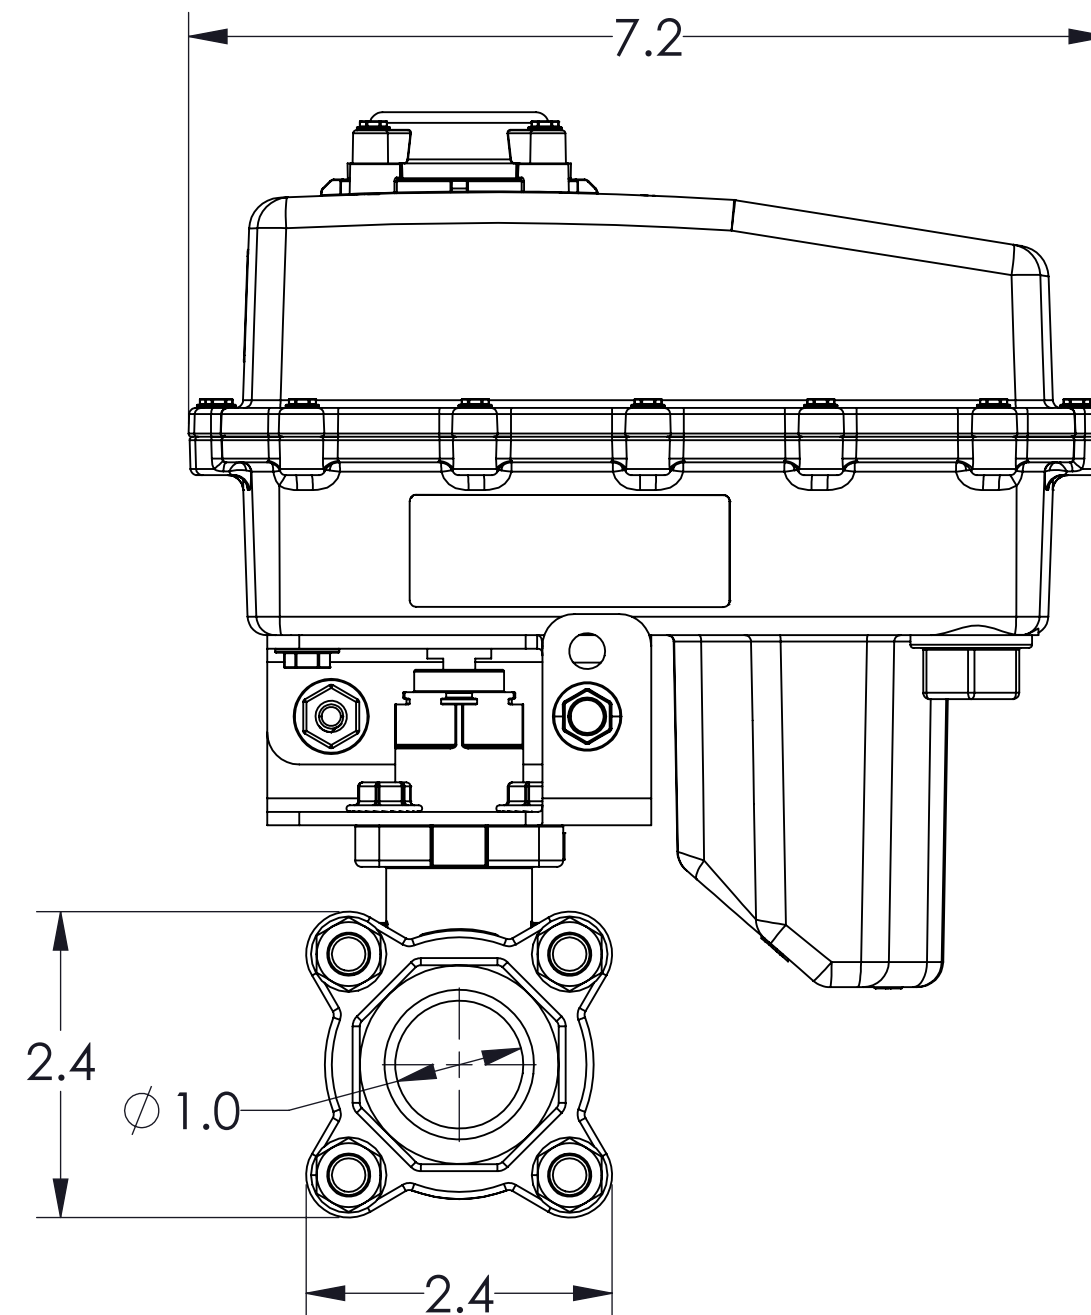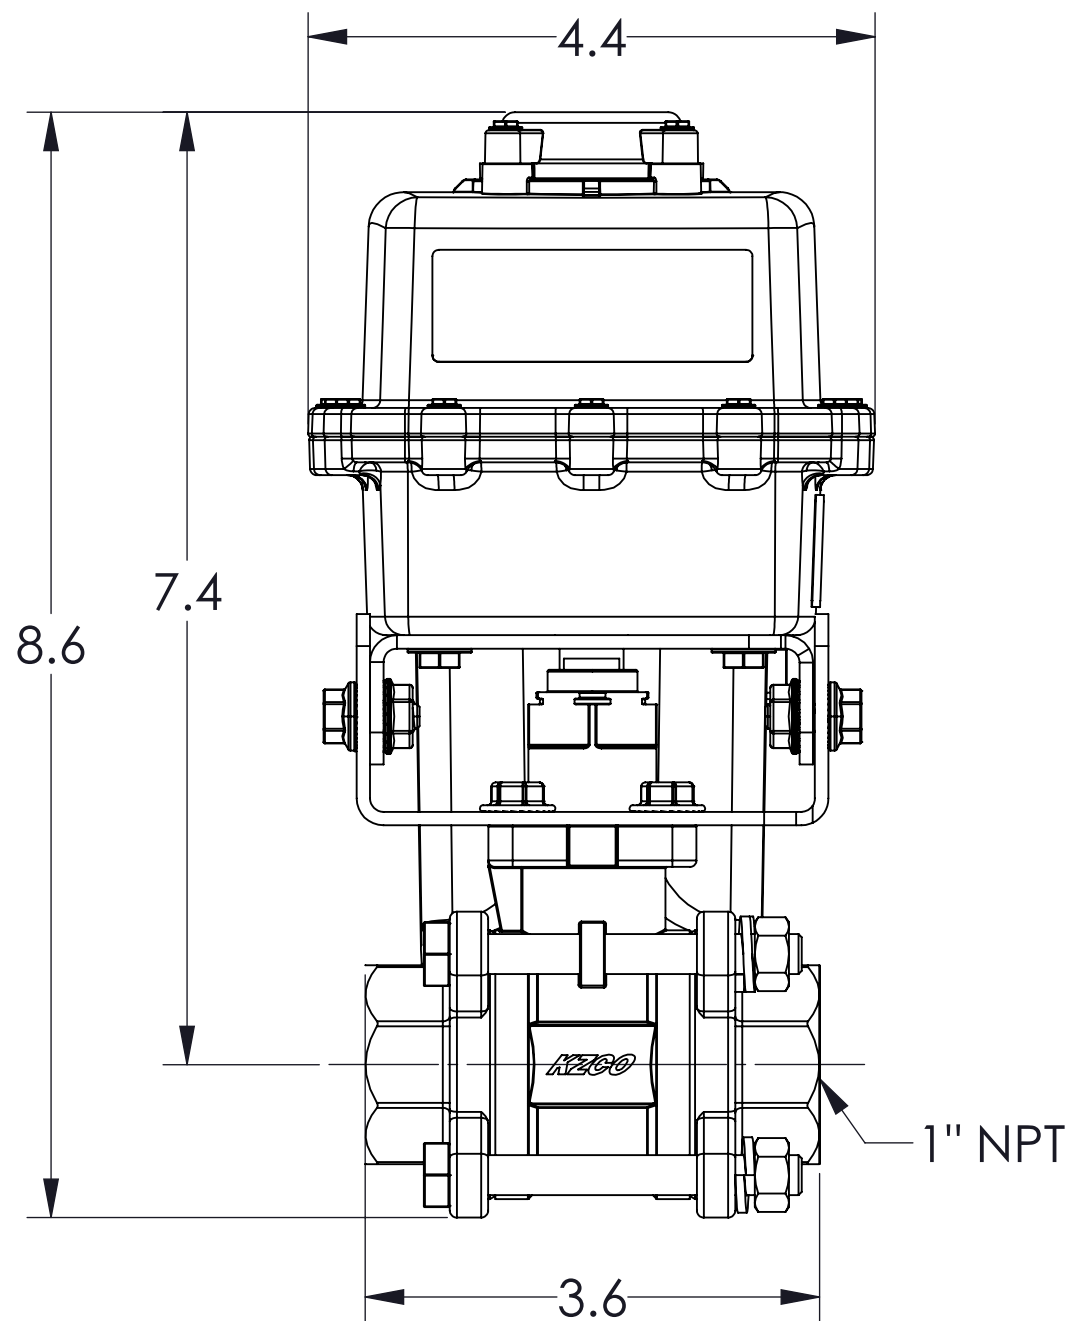

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]-	
.X±0.1	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001 / .010 SURFACE FINISH: 125 µIN
.XX±0.001	
.XXX±0.005	
.X°±1°	
DENSITY: 0.194 LBM/CU IN MASS: 9.974 LBM SURF AREA: 686.088 SQ IN VOLUME: 51.298 CU IN	

DESIGNED BY: Brian Pham
DRAWN BY: Aaron Goodwin
APPROVED:
SCALE: 2:3
SIZE: B
MATERIAL: AS NOTED

		<small>23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402</small>
TITLE: ACTUATED VALVE, EH22, 1" SS 3-PC, 2-WAY, OFFSET, ON/OFF, 1.5S@12VDC		
PART NO: 89F22-10DY0-PF1	REV: 1	
DRAWING NO: SALES_89F22-10DY0-PF1	SHEET: 1 OF 1	

CONFORMS TO ASME STANDARDS Y14.5-2009

4

3

2

1