

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

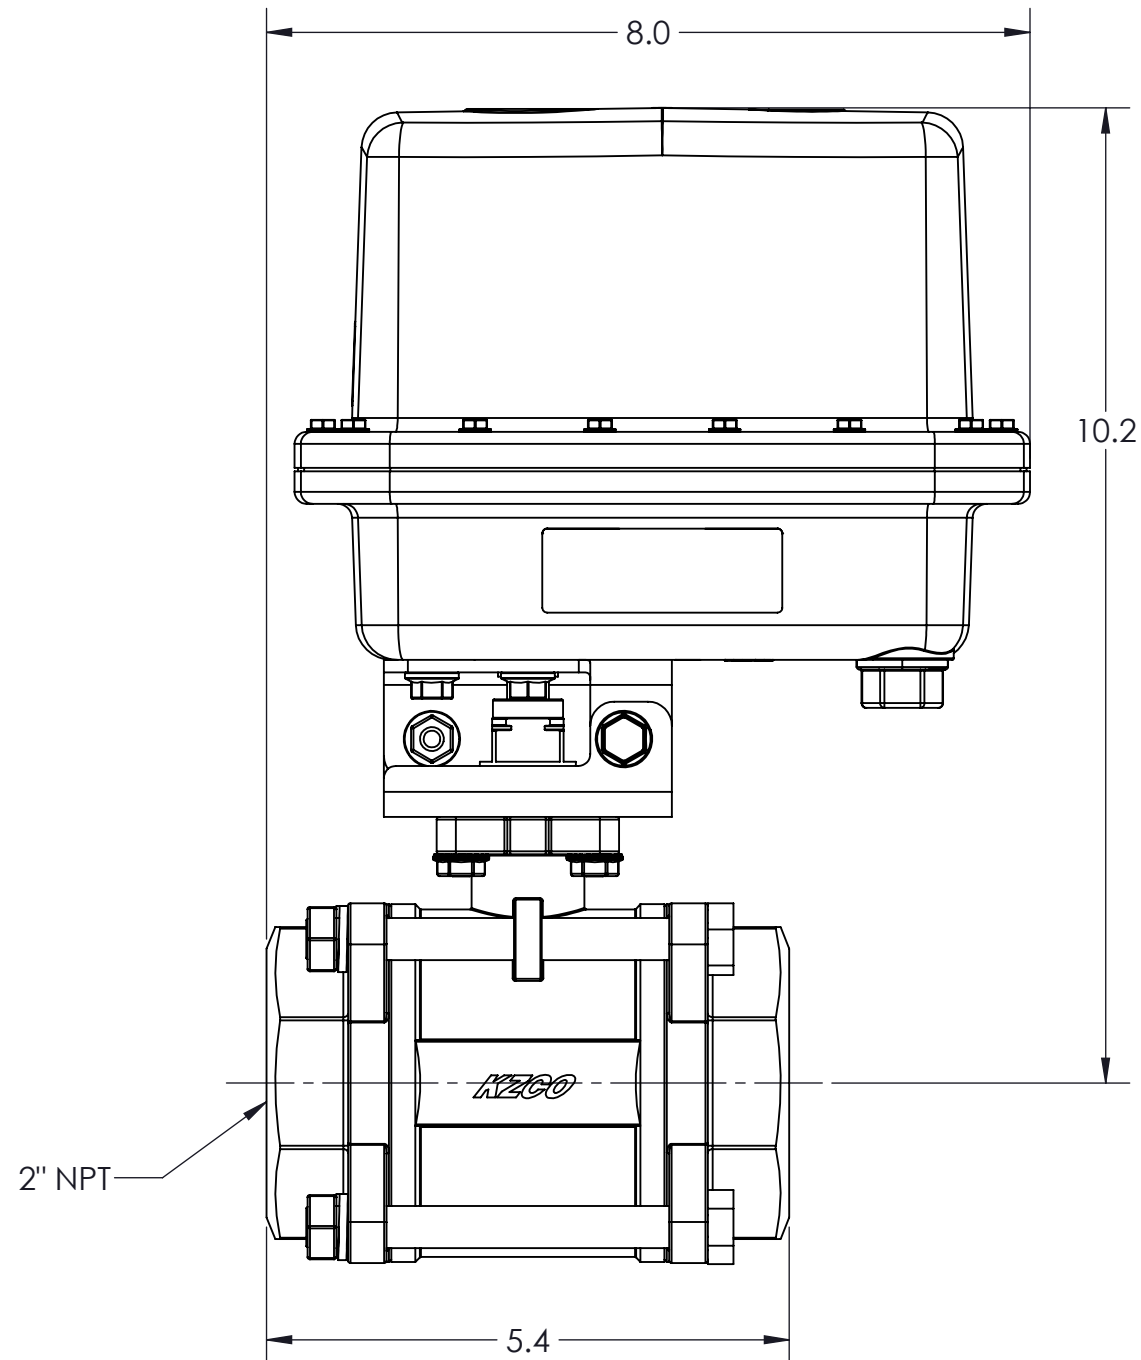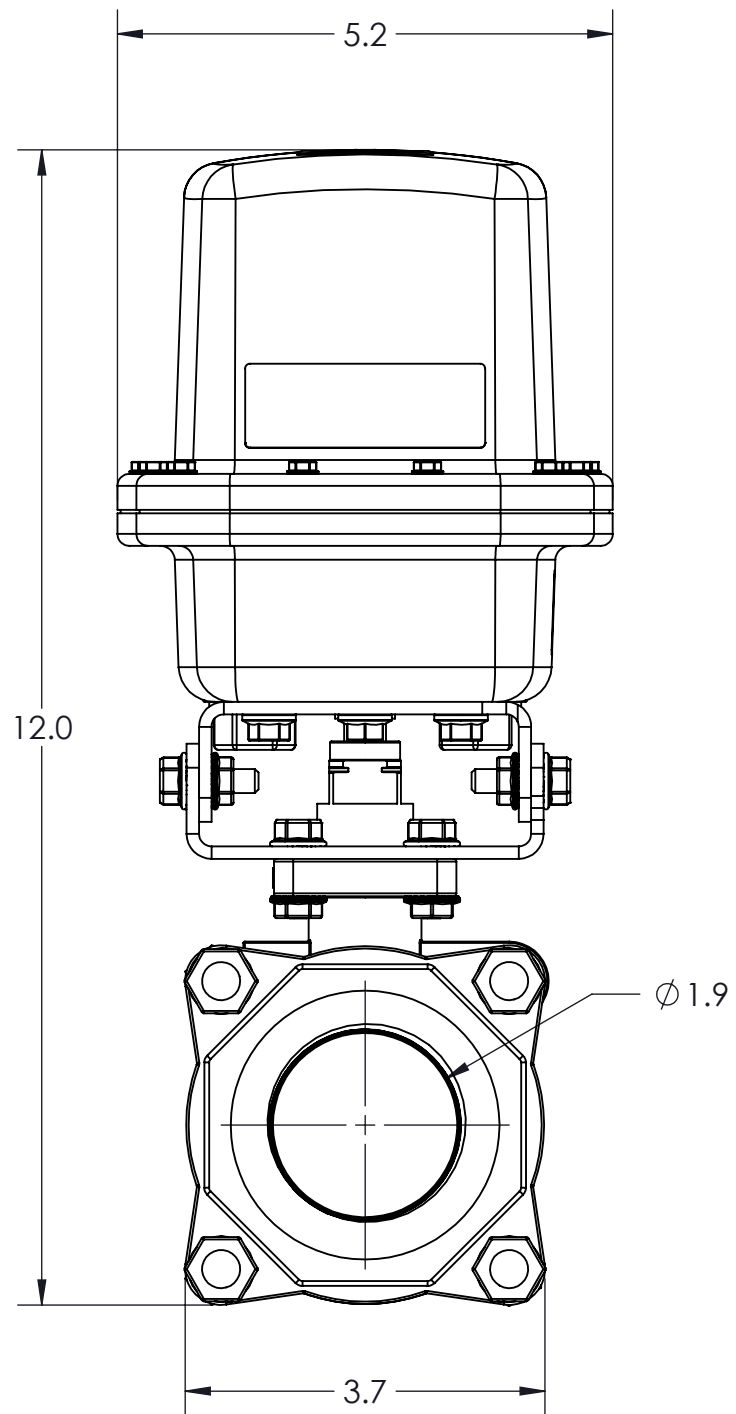

-STANDARD TOLERANCES-
-ALL DIMENSIONS IN INCHES [mm]-

.X±0.1	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 µIN
.XX±0.001	
.XXX±0.005	
.XX°±1°	

DENSITY: 3690.025 LBM/CU IN
MASS: 391.635.316 LBM
SURF AREA: 1074.672 SQ IN
VOLUME: 106.134 CU IN

DESIGNED BY: Brian Pham
DRAWN BY: Aaron Goodwin
APPROVED:
SCALE: 1:2
SIZE: B
MATERIAL: Material <not specified>

KZCO inc.		23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402
TITLE: ACTUATED VALVE, EH5, 2", SS 3-PC, WAY, INLINE MTG, ON/OFF, 3 SEC @ 12VDC, 3ST DR4		
PART NO: 89I35-10D50-DB1	REV: 1	
DRAWING NO: SALES_89I35-10D50-DB1	SHEET: 1 OF 1	

CONFORMS TO ASME STANDARDS Y14.5-2009

4

3

2

1

B

B

A

A