

4


3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

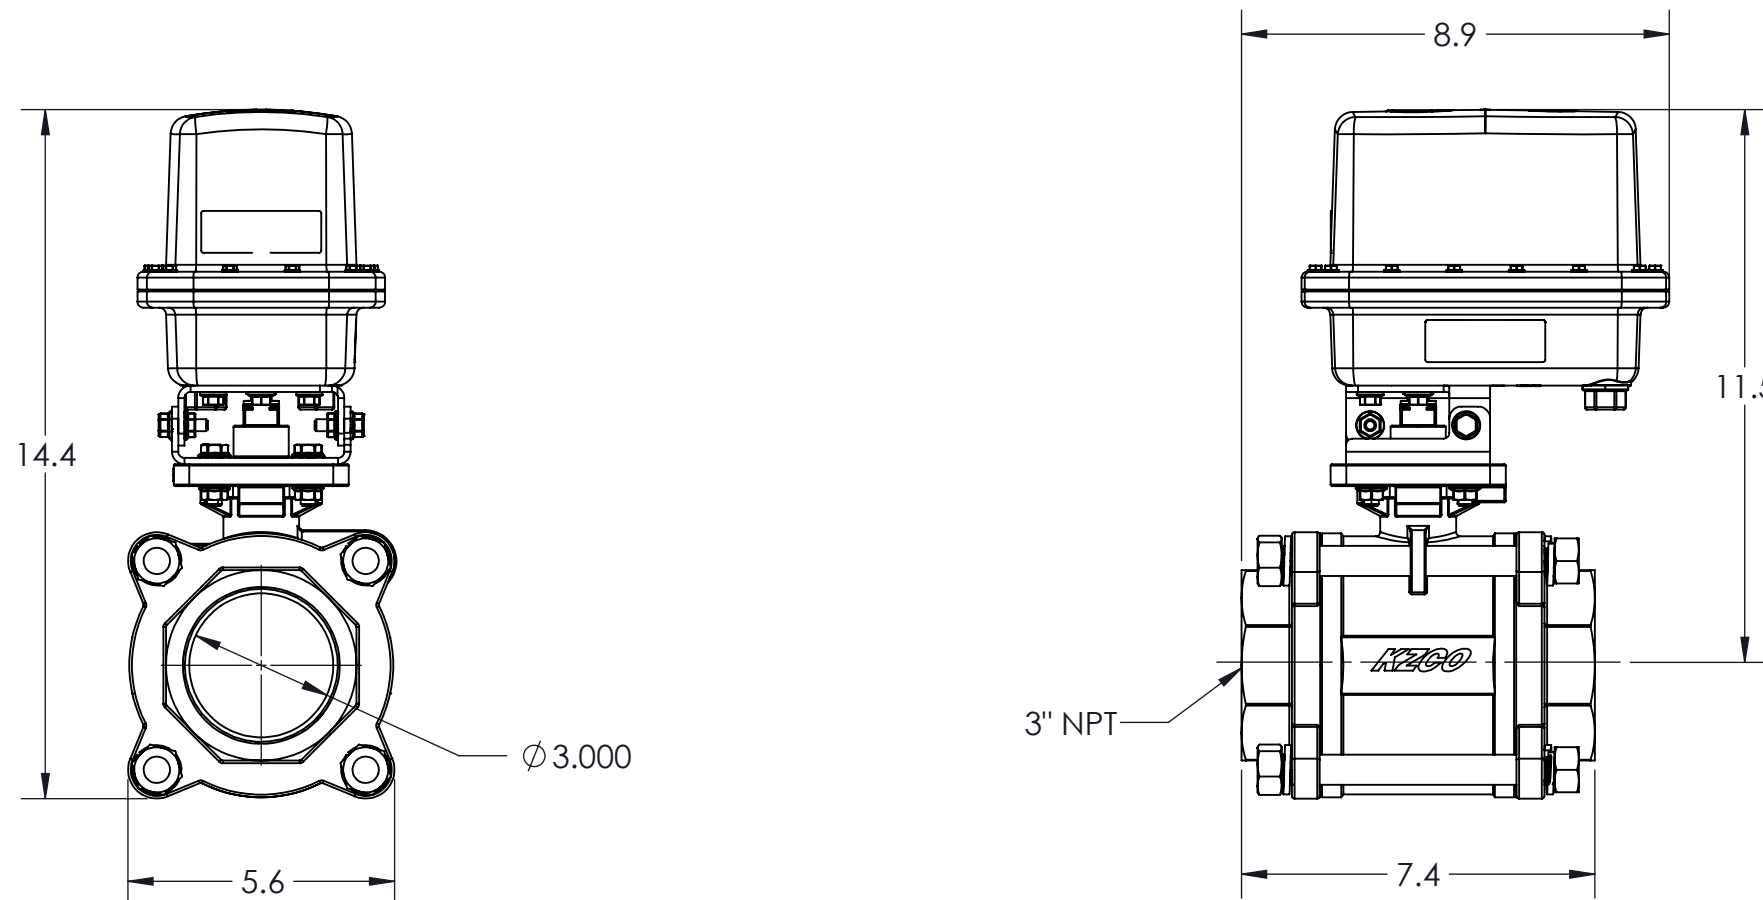

CONFORMS TO ASME STANDARDS Y14.5-2009

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]- .X±0.1 .XX±0.001 .XXX±0.005 .X°±1°		DESIGNED BY: Brian Pham DRAWN BY: Aaron Goodwin APPROVED: SCALE: 1:4 SIZE: B MATERIAL: Material <not specified>	23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402
TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 µIN DENSITY: 2318.177 LBM/CU IN MASS: 391673.178 LBM SURF AREA: 1358.813 SQ IN VOLUME: 168.957 CU IN		TITLE: ACTUATED VALVE, EH5, 3" SS 3-PC, 2-WAY, INLINE MTG ON/OFF, 3 SEC @ 12VDC, 3 ST DR4 PART NO: 89K35-10D50-DB1 DRAWING NO: SALES_89K35-10D50-DB1	
			REV: 1 SHEET: 1 OF 1

4

3

2

1

A

A

B

B