

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

REVISIONS					
ZONE	REV.	ECN	CHANGE DESCRIPTION	DATE	MODIFIED BY
	1			7/10/2020	

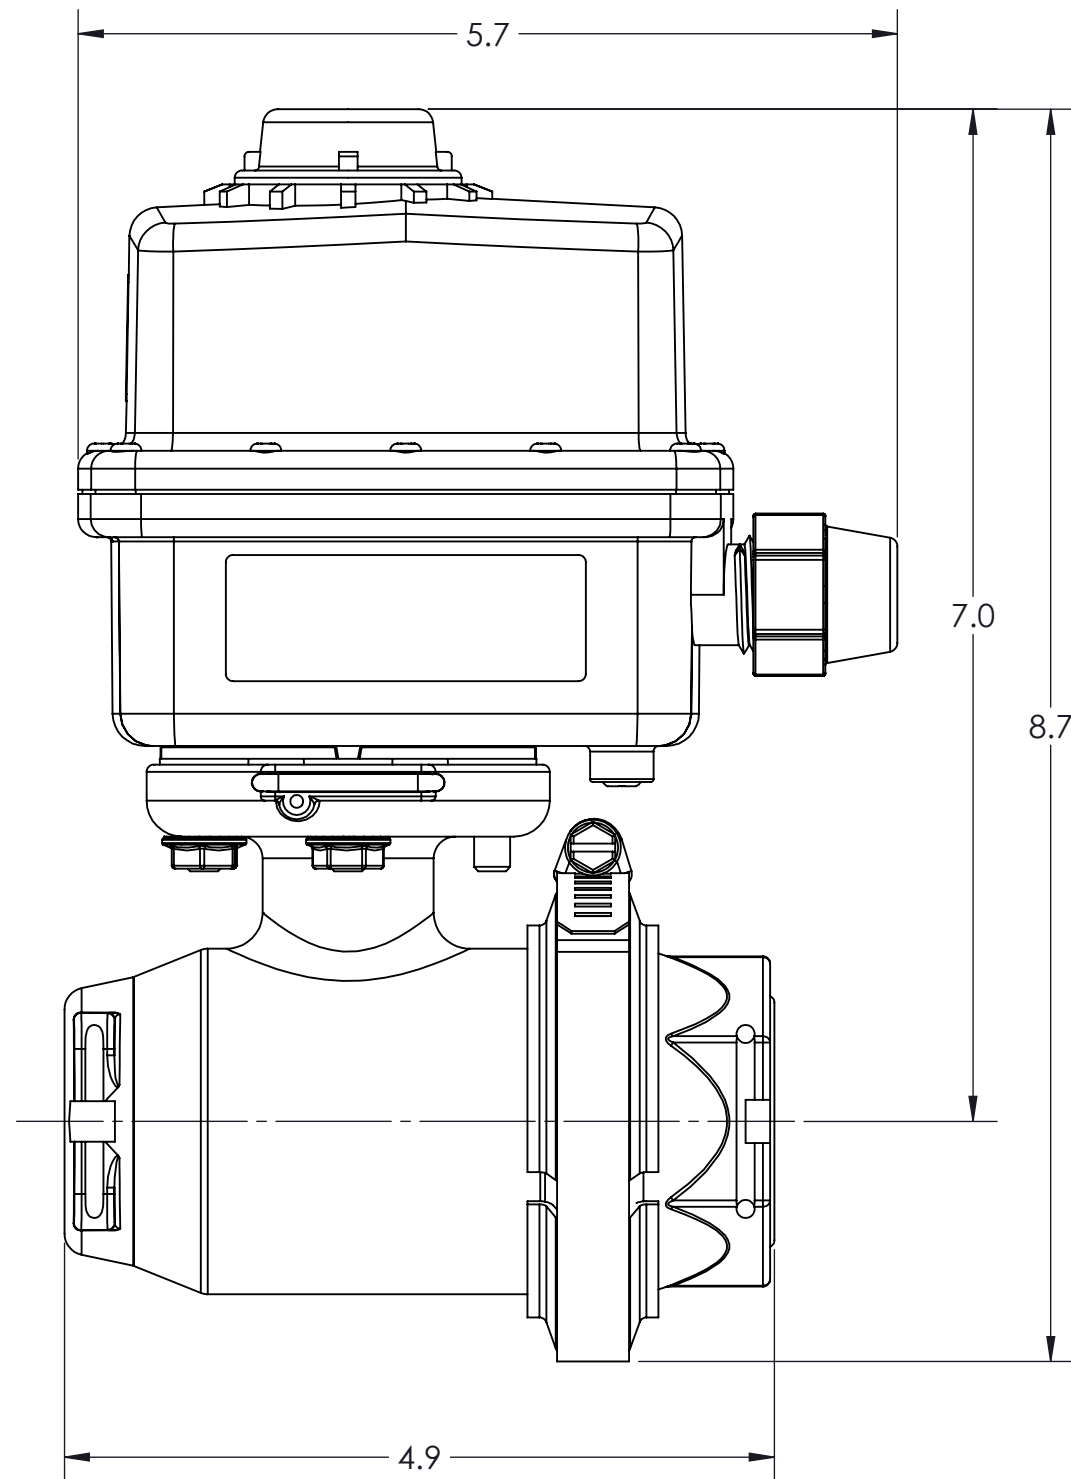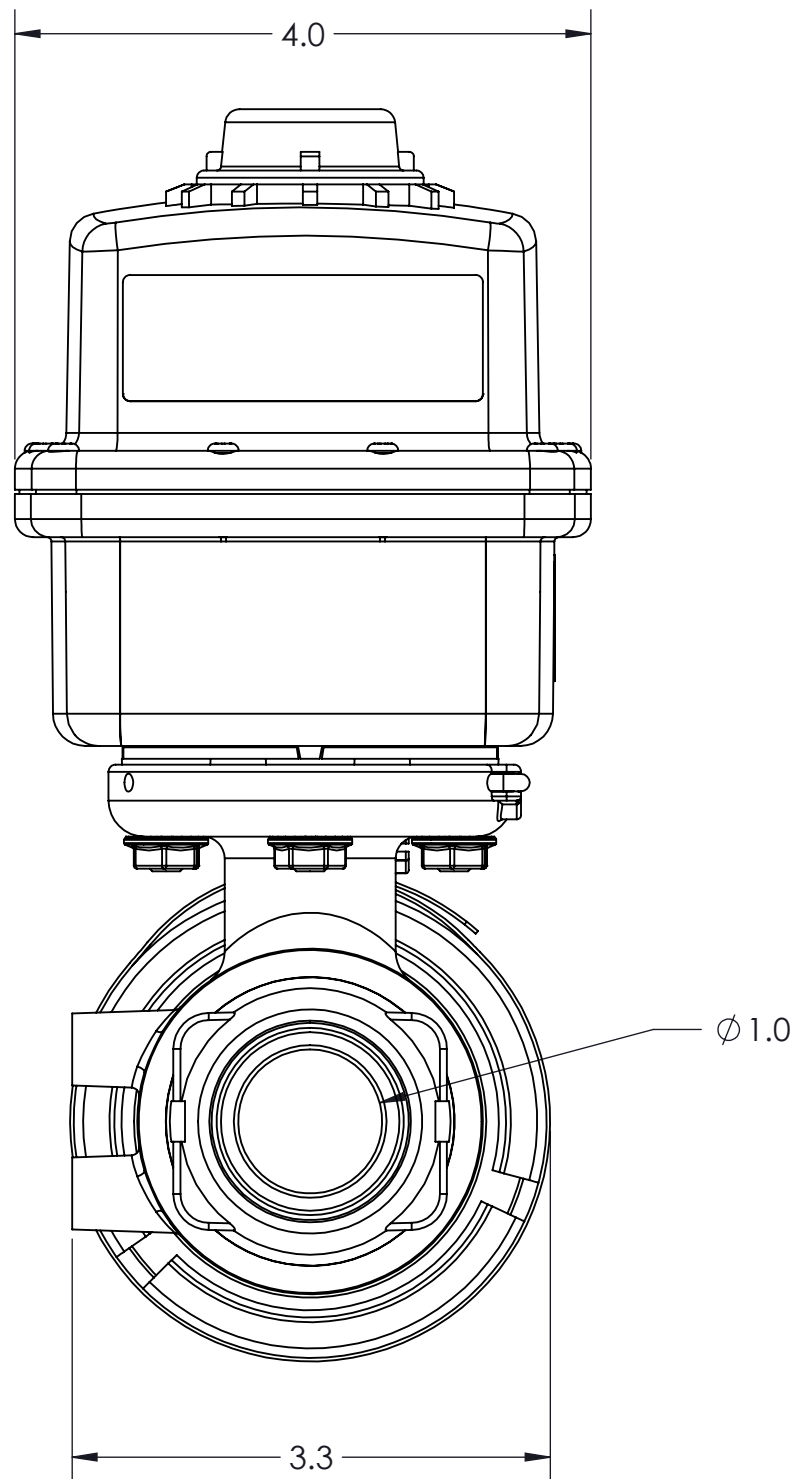

CONFORMS TO ASME STANDARDS Y14.5-2009

-STANDARD TOLERANCES-  
-ALL DIMENSIONS IN INCHES [mm]-

.X±0.1  
.XX±0.01  
.XXX±0.005  
.X°±1°

TOTAL RUNOUT: .005 FIM  
CORNER BREAK: .001 / .010  
SURFACE FINISH: 125 µIN

DENSITY: 0.073 LBM/CU IN  
MASS: 3.309 LBM  
SURF AREA: 586.351 SQ IN  
VOLUME: 45.188 CU IN

DESIGNED BY: Jason Moran  
DRAWN BY: Jason Moran  
APPROVED:  
SCALE: 3:4  
SIZE: B  
MATERIAL: Material <not specified>



23860 KZ PARKWAY  
GREENWOOD, NE 68366 USA  
PHONE: +1.402.944.2767  
FAX: +1.402.944.2402

TITLE: ACTUATED VALVE, EH3, 1", POLY 2-WAY FNPT, ON/OFF, 0.8 SEC @ 12VDC, 3ST WP3T

PART NO: F2F33-10D20-P01  
DRAWING NO: SALES\_F2F33-10D20-P01  
REV: 1  
SHEET: 1 OF 2

4

3

2

1

B

B

A

A