

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

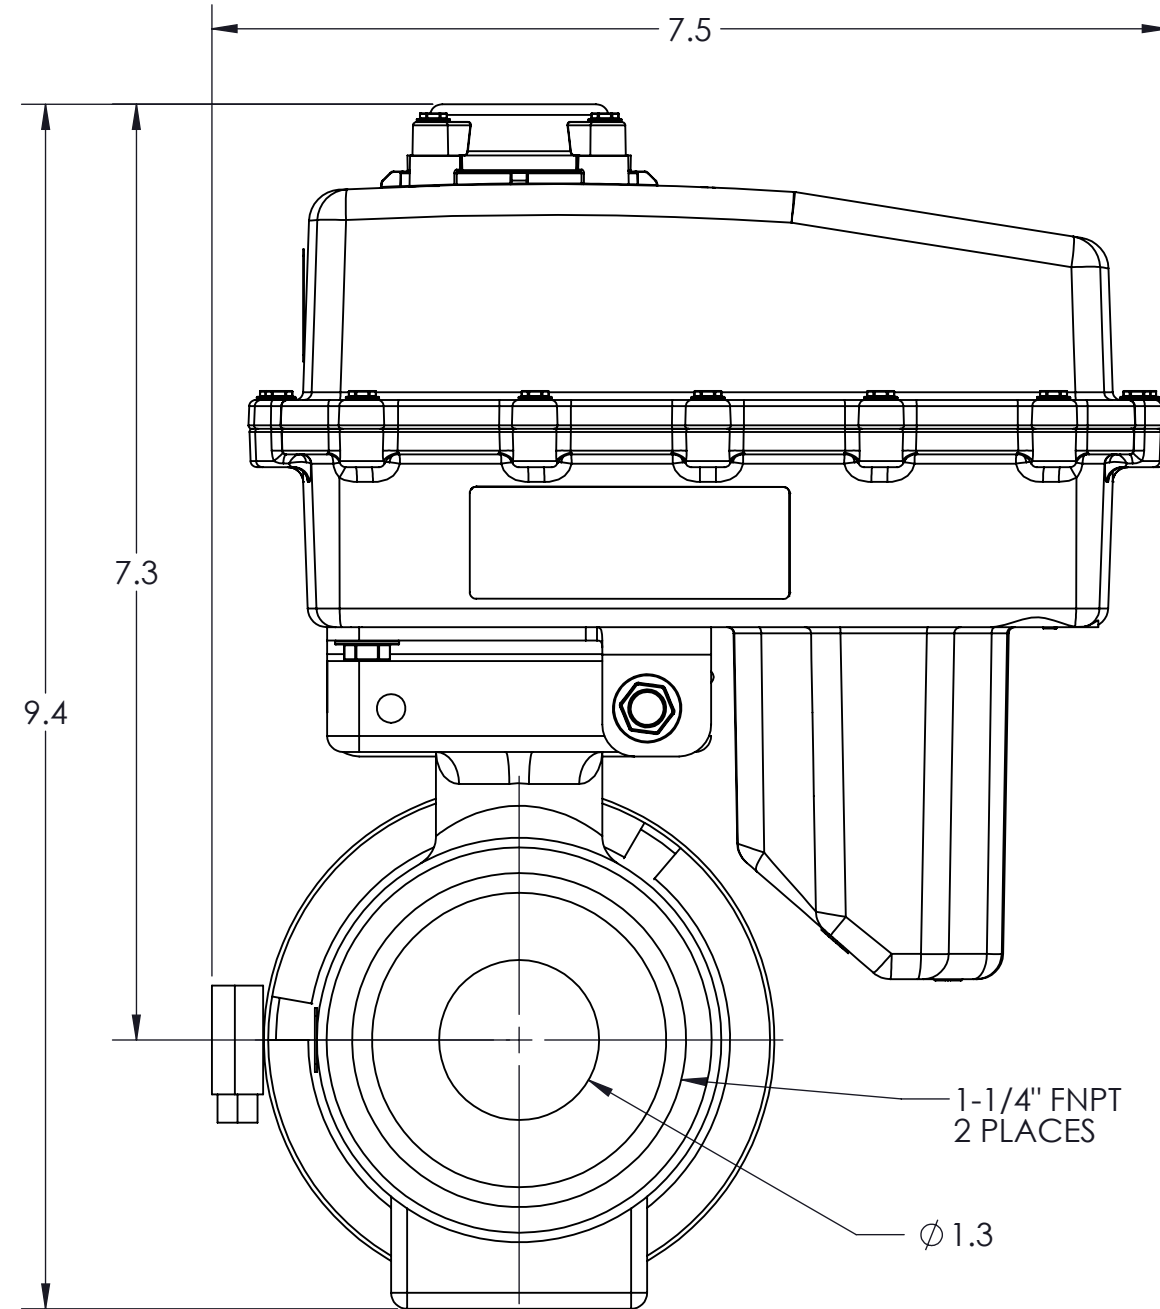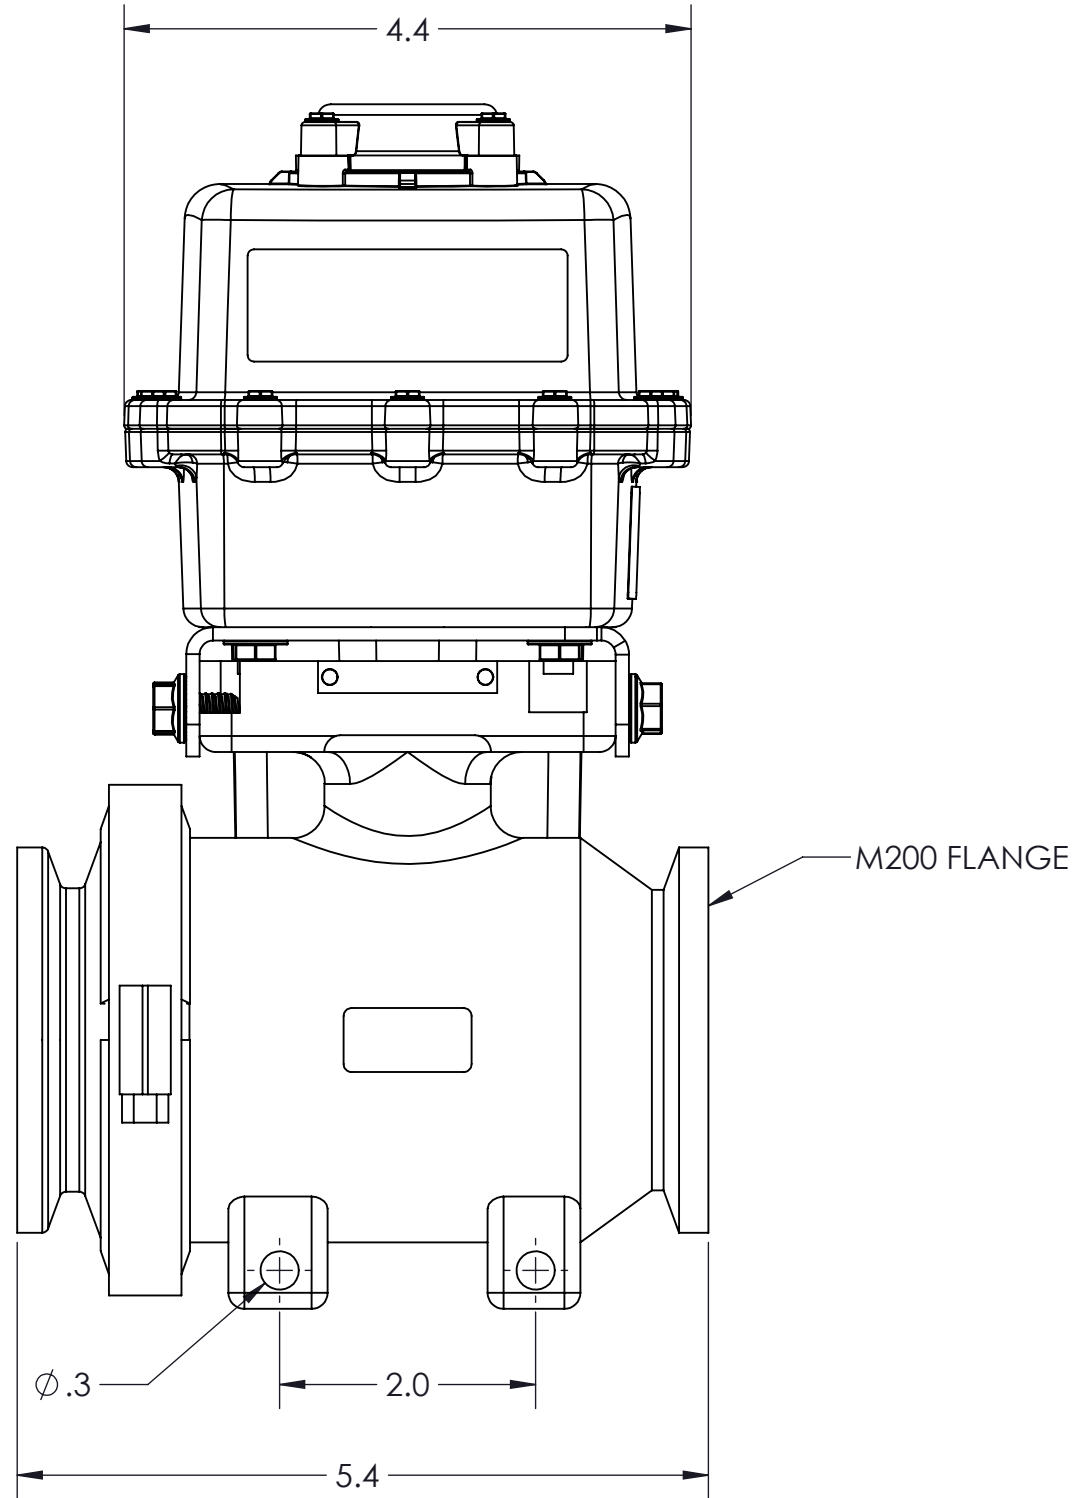

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]- .X±0.1 .XX±0.01 .XXX±0.005 .X°±1°	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 µIN 	DESIGNED BY: Lindsey Niemann		23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402
		DRAWN BY: Jason Moran		
DENSITY: 0.067 LBM/CU IN MASS: 5.172 LBM SURF AREA: 820.040 SQ IN VOLUME: 76.926 CU IN		APPROVED:	TITLE: ACTUATED VALVE, EH22, 1-1/4" POLY, 2-WAY, ON/OFF, 1.5SEC @ 12VDC, 3ST WP3T	REV: 1
CONFORMS TO ASME STANDARDS Y14.5-2009		SCALE: 2:3	PART NO: F2G22-10DY0-PF1	SHEET: 1 OF 2
		SIZE: B	DRAWING NO: SALES_F2G22-10DY0-PF1	
		MATERIAL: Material <not specified>		

4

3

2

1