

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

REVISIONS					
ZONE	REV.	ECN	CHANGE DESCRIPTION	DATE	MODIFIED BY
	1			7/20/2020	Jason Moran

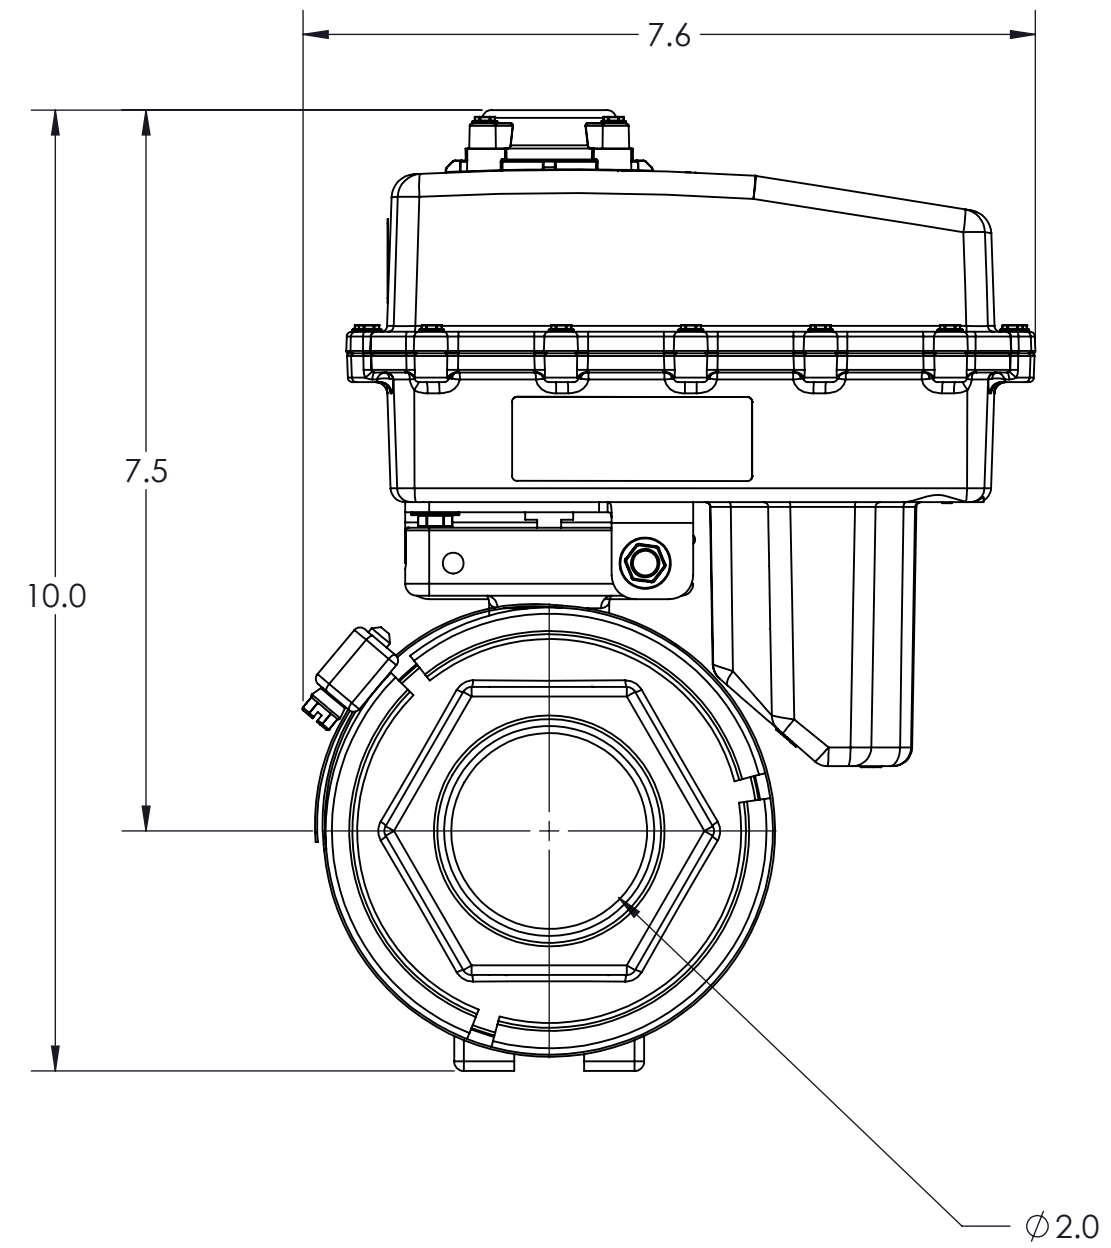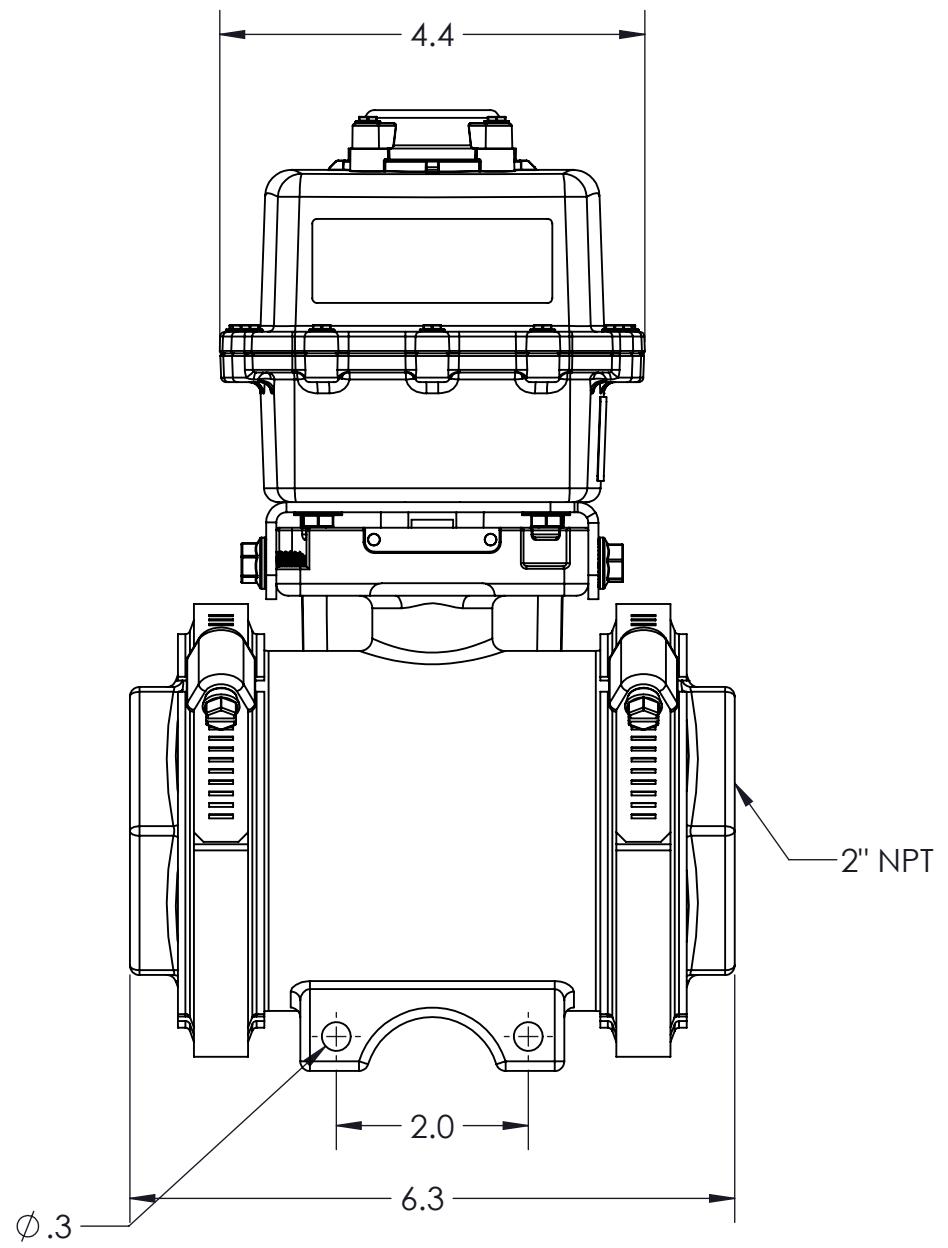

CONFORMS TO ASME STANDARDS Y14.5-2009

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]- .X±0.1 .XX±0.01 .XXX±0.005 .X°±1°	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 µIN 	DESIGNED BY: Larry Erdkamp
		DRAWN BY: Jason Moran
		APPROVED:
		SCALE: 1:2
		SIZE: B
		MATERIAL: Material <not specified>
DENSITY: 0.074 LBM/CU IN MASS: 6.796 LBM SURF AREA: 1045.703 SQ IN VOLUME: 91.893 CU IN		

		23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402	
		TITLE: ACTUATED VALVE, EH22, 2" POLY, 2-WAY, ON/OFF, 1.5SEC @ 12VDC, 3ST WP3T	
PART NO: F2I22-10DY0-PF1	REV: 1		
DRAWING NO: SALES_F2I22-10DY0-PF1	SHEET: 1 OF 2		

4

3

2

1