

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO
KZCO, INC. UNAUTHORIZED USE, DISCLOSURE
OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

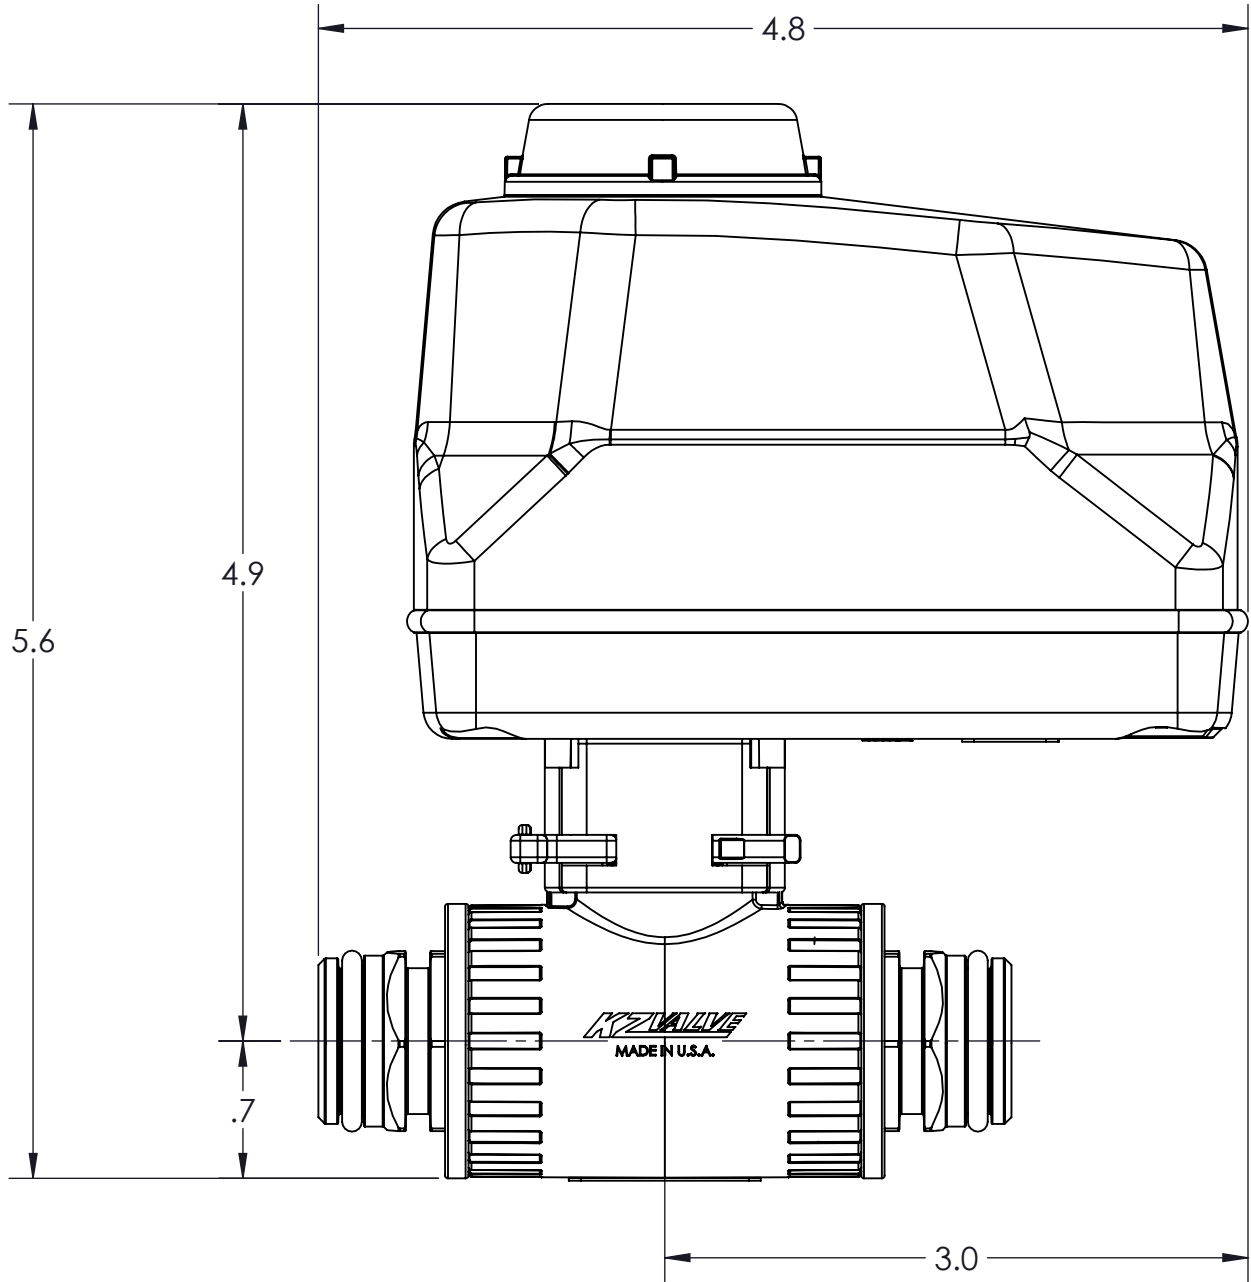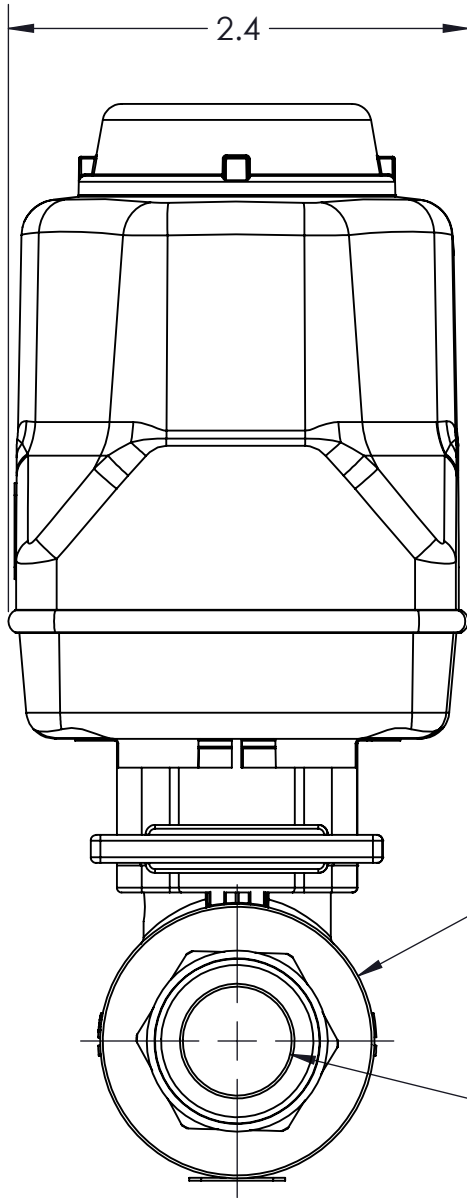

CONFORMS TO ASME
STANDARDS Y14.5-2009

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]-	
.X±0.1 .XX±0.01 .XXX±0.005 .XX°±1°	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 µIN
DENSITY: 0.054 LBM/CU IN MASS: 0.935 LBM SURF AREA: 318.079 SQ IN VOLUME: 17.297 CU IN	

DESIGNED BY: Nathaniel Rasmussen
DRAWN BY: Jason Moran
APPROVED:
SCALE: 1:1
SIZE: B
MATERIAL: Material <not specified>

 <div>23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402</div>	
TITLE: ACTUATED VALVE, EH7, TX2, 1/2", 2 WAY, 0.5S@12VDC	
PART NO: H2D37-10DK0-P01	REV: 1
DRAWING NO: SALES_H2D37-10DK0-P01	SHEET: 1 OF 2

4

3

2

1