

4

3

2



1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM


B

B

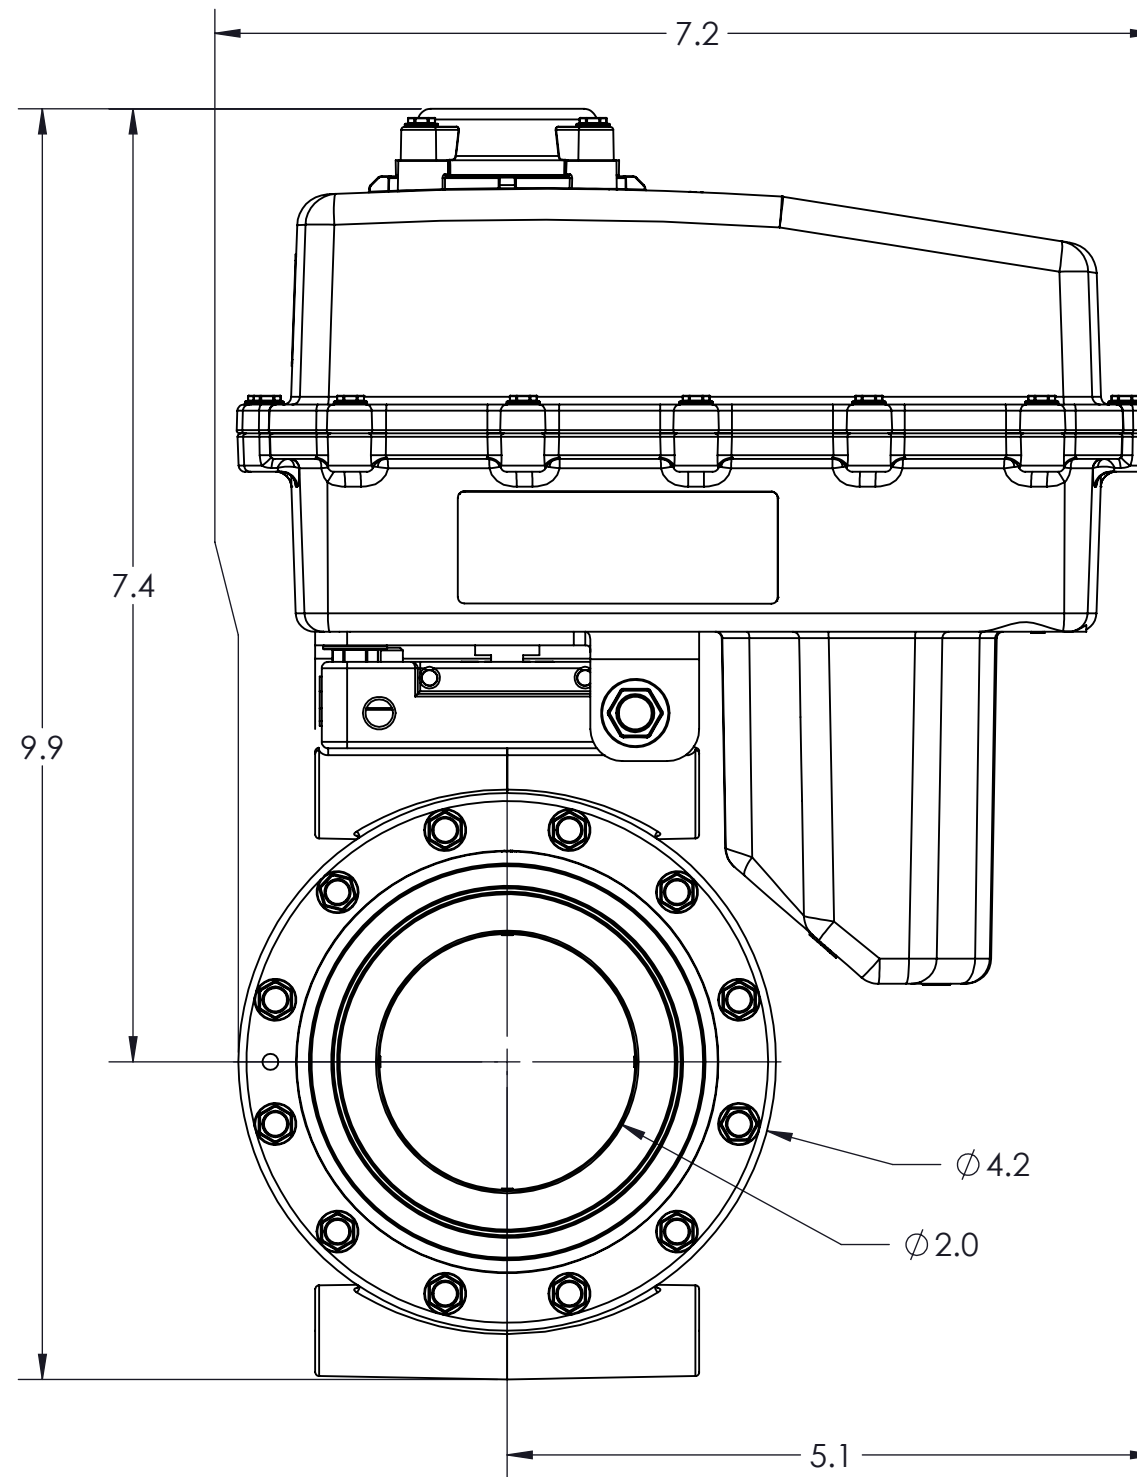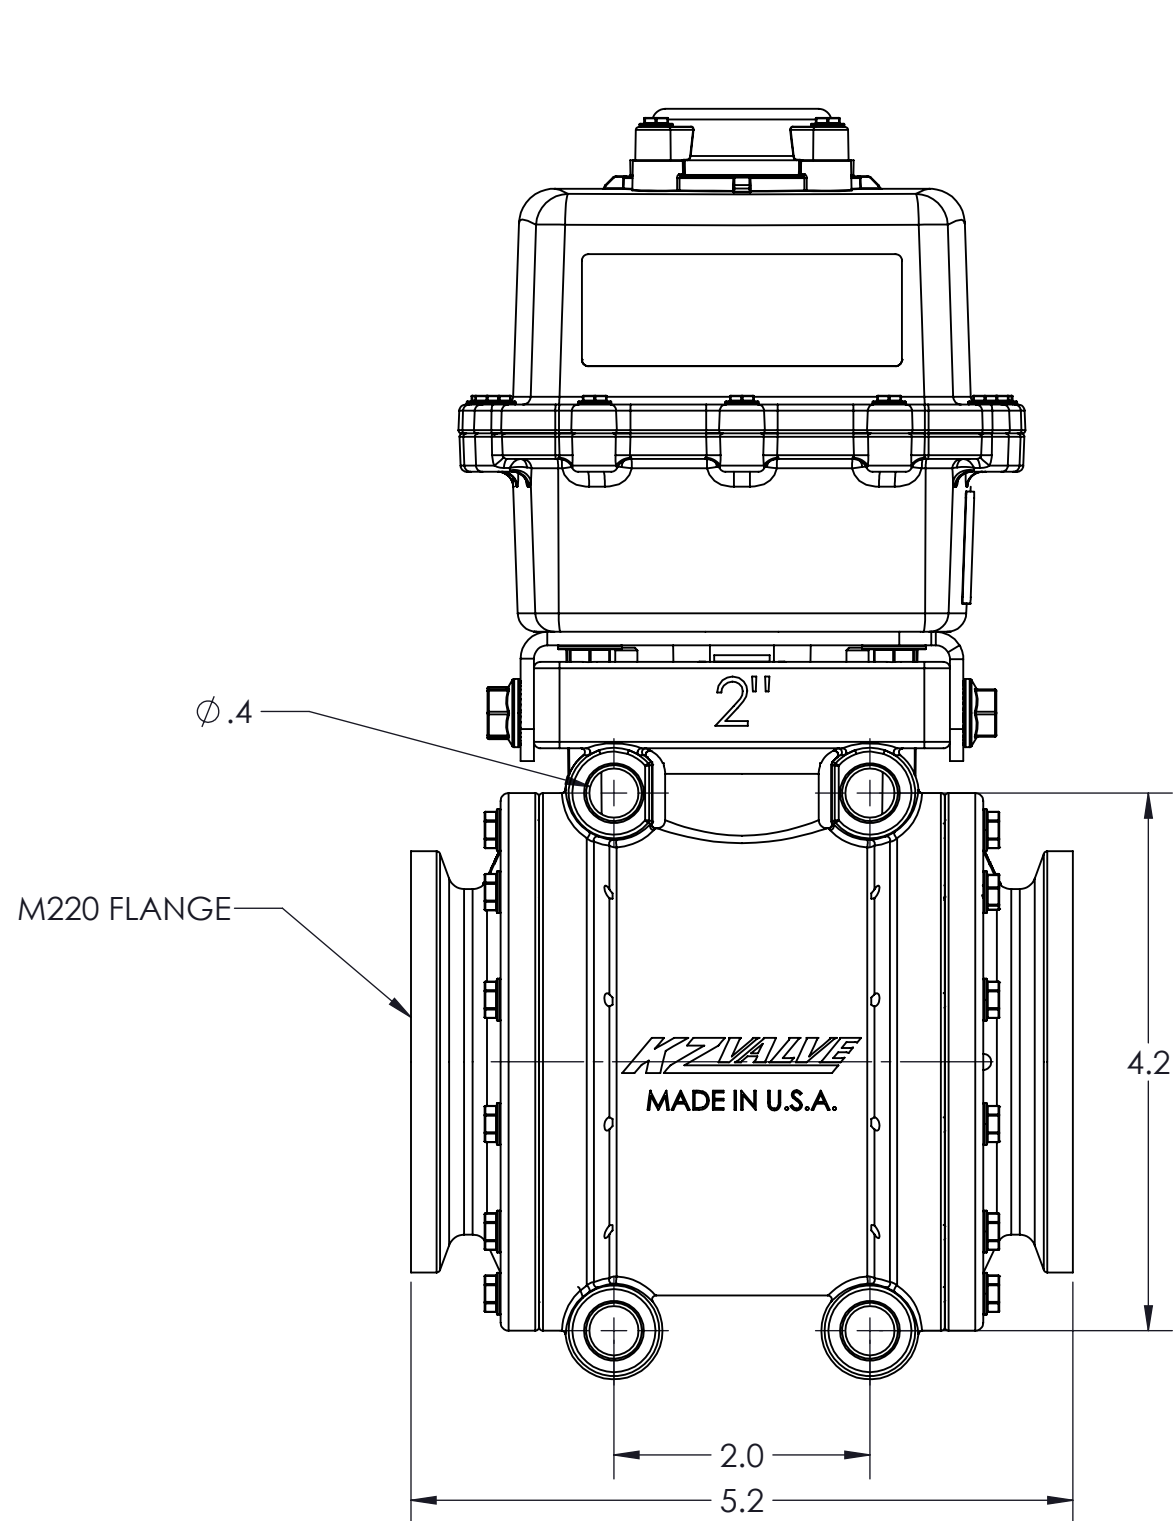

A

A

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]-	
.X±0.1	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 µIN 
.XX±0.01	
.XXX±0.005	
.X°±1°	
DENSITY: 0.049 LBM/CU IN MASS: 3.968 LBM SURF AREA: 913.730 SQ IN VOLUME: 81.247 CU IN	

CONFORMS TO ASME STANDARDS Y14.5-2009

DESIGNED BY: Larry Erdkamp
DRAWN BY: Jason Moran
APPROVED:
SCALE: 2:3
SIZE: B
MATERIAL: Material <not specified>



23860 KZ PARKWAY  
GREENWOOD, NE 68366 USA  
PHONE: +1.402.944.2767  
FAX: +1.402.944.2402

TITLE: ACTUATED VALVE, MX8 2" FP 2-WAY, 2" FP FLANGE, EH22 OFFSET MTG, 1.5S12VDC

PART NO: M2I22-10DY0-PF1	REV: 1
DRAWING NO: SALES_M2I22-10DY0-PF1	SHEET: 1 OF 2

4

3

2

1