

DESIGN NOTES:

1. PART NUMBER: NAZC28-1CEBS-D01
2. KZVALVE ACTUATOR SERIES: EH8
3. ACTUATION TIME: 0.2S @ 12 VDC
4. AMBIENT OPERATING TEMP: -40°F TO 185°F (-40°C TO 85°C)
5. AMBIENT STORAGE TEMP: -67°F TO 221 °F (-55°C TO 105°C)
6. ENCLOSURE RATING: IP68 PER ISO 20653, NEMA 6P/7D PER NEMA 250
7. UP TO 90 DEG OF TOTAL TRAVEL - ROTATION TO OPEN STATE IS CLOCKWISE WHEN VIEWED FROM THE BOTTOM SIDE
8. ELECTRICAL

1. OPERATING INPUT VOLTAGE: 9-32 VDC

2. CURRENT DRAW

1. NORMAL OPERATION: 0.4 AMPS @ 12 VDC

2. CONTINUOUS (RUNNING STATE): 0.04 AMPS

3. STALL (LOCKED ROTOR): 1.8 AMPS @ 12 VDC
3. CONNECTION: 4-PIN DEUTSCH RECEPTACLE

1. PIN MATERIAL: GOLD-PLATED BRASS
4. PINOUT

1. PIN 1 - POWER IN (-)

2. PIN 2 - FEEDBACK (+) AT OPEN

3. PIN 3- SIG 1 (+) @ OPEN

4. PIN 4- POWER IN (+)

9. VALVE

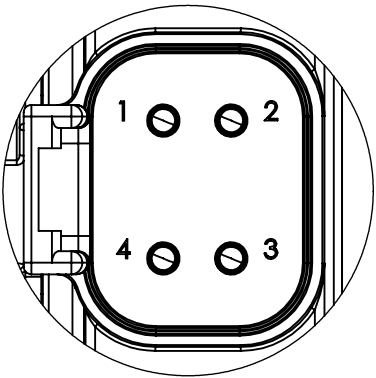
5. WETTED MATERIALS: FKM, CG REINFORCED PTFE, NYLON, 316SS

6. MAX PRESSURE DIFFERENTIAL: 150 PSI @ 70°F

7. MAX BODY PRESSURE: 300 PSI @ 70°F

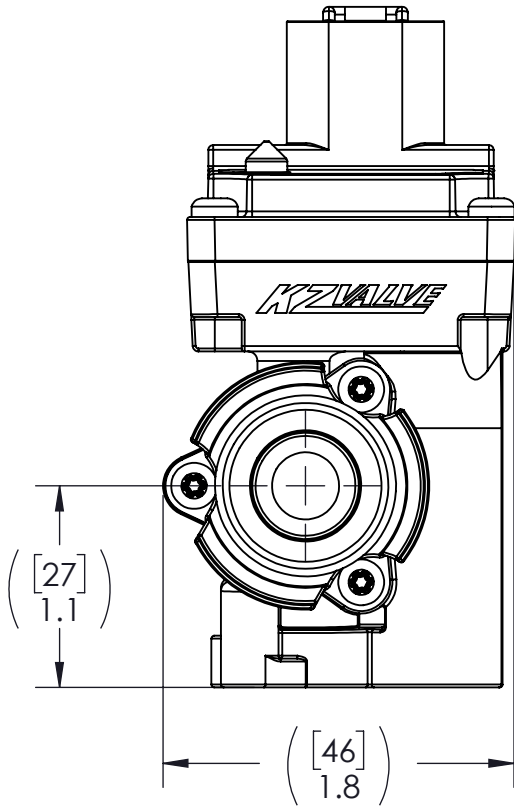
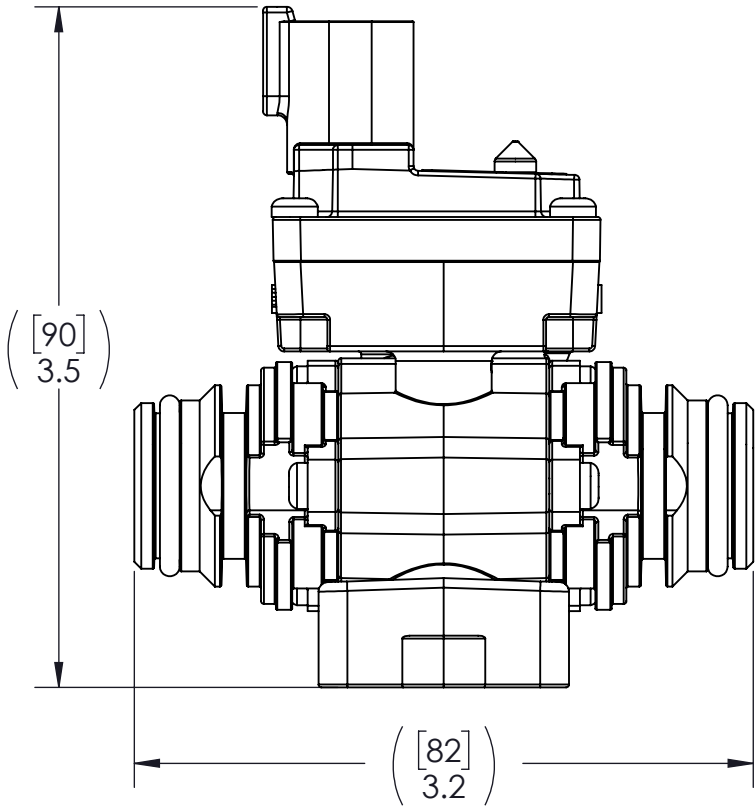
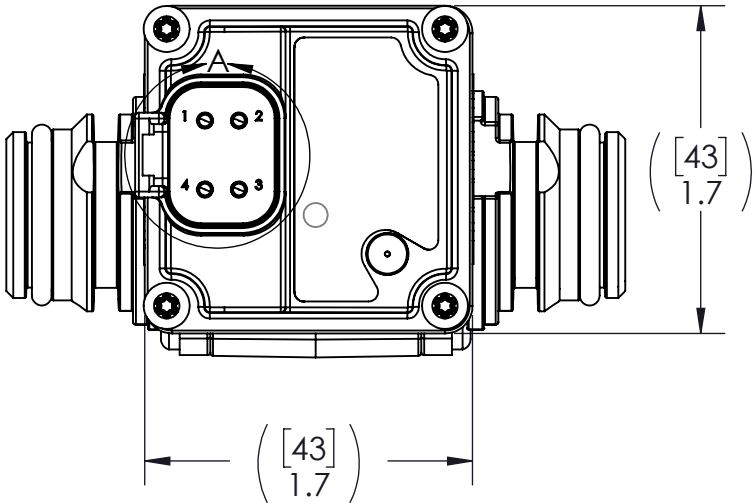
8. FLOW RATE: 5.2 GPM @ 1 PSI PRESSURE DIFFERENTIAL

9. CONNECTIONS: 2X 1/2" QD CONNECTIONS





DETAIL A
SCALE 2 : 1

LED INDICATOR TABLE			
INDICATOR	RATE	COLOR	STATUS
SOLID	-	GREEN	CURRENTLY AT ON POSITION
SOLID	-	RED	CURRENTLY AT OFF POSITION
BLINKING	2.8 Hz	RED	FAULT/TIMEOUT



CUSTOMER REVISIONS			
REV	ECN	CHANGE	MODIFIED BY
1	24-0723	CREATED CUSTOMER SHEET	Austin Gemar
2	24-0723	ADDED LED TABLE	Austin Gemar

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]-		DESIGNED BY: Evan Schwahn		<div></div> <div>23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402</div>	
.X±.1 .XX±.01 .XXX±.005 .XX°±1°	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 µIN 	DRAWN BY: Brian Pham			
		APPROVED:		TITLE: ACTUATED VALVE, EH8, 3/8" 2-WAY SS BALL, 1/2" QD, 0.2S@12/24VDC, DEUTSCH LED	
		SCALE: 1:1	SIZE: B		
DENSITY: 0.049 LBM/CU IN MASS: 0.234 LBM SURF AREA: 98.067 SQ IN VOLUME: 4.759 CU IN		MATERIAL:		PART NO: NAZC28-1CEBS-D01 REV: 6	
				DRAWING NO: NAZC28-1CEBS-D01 SHEET: 1 OF 1	

CONFORMS TO ASME
STANDARDS Y14.5-2009