

4


3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

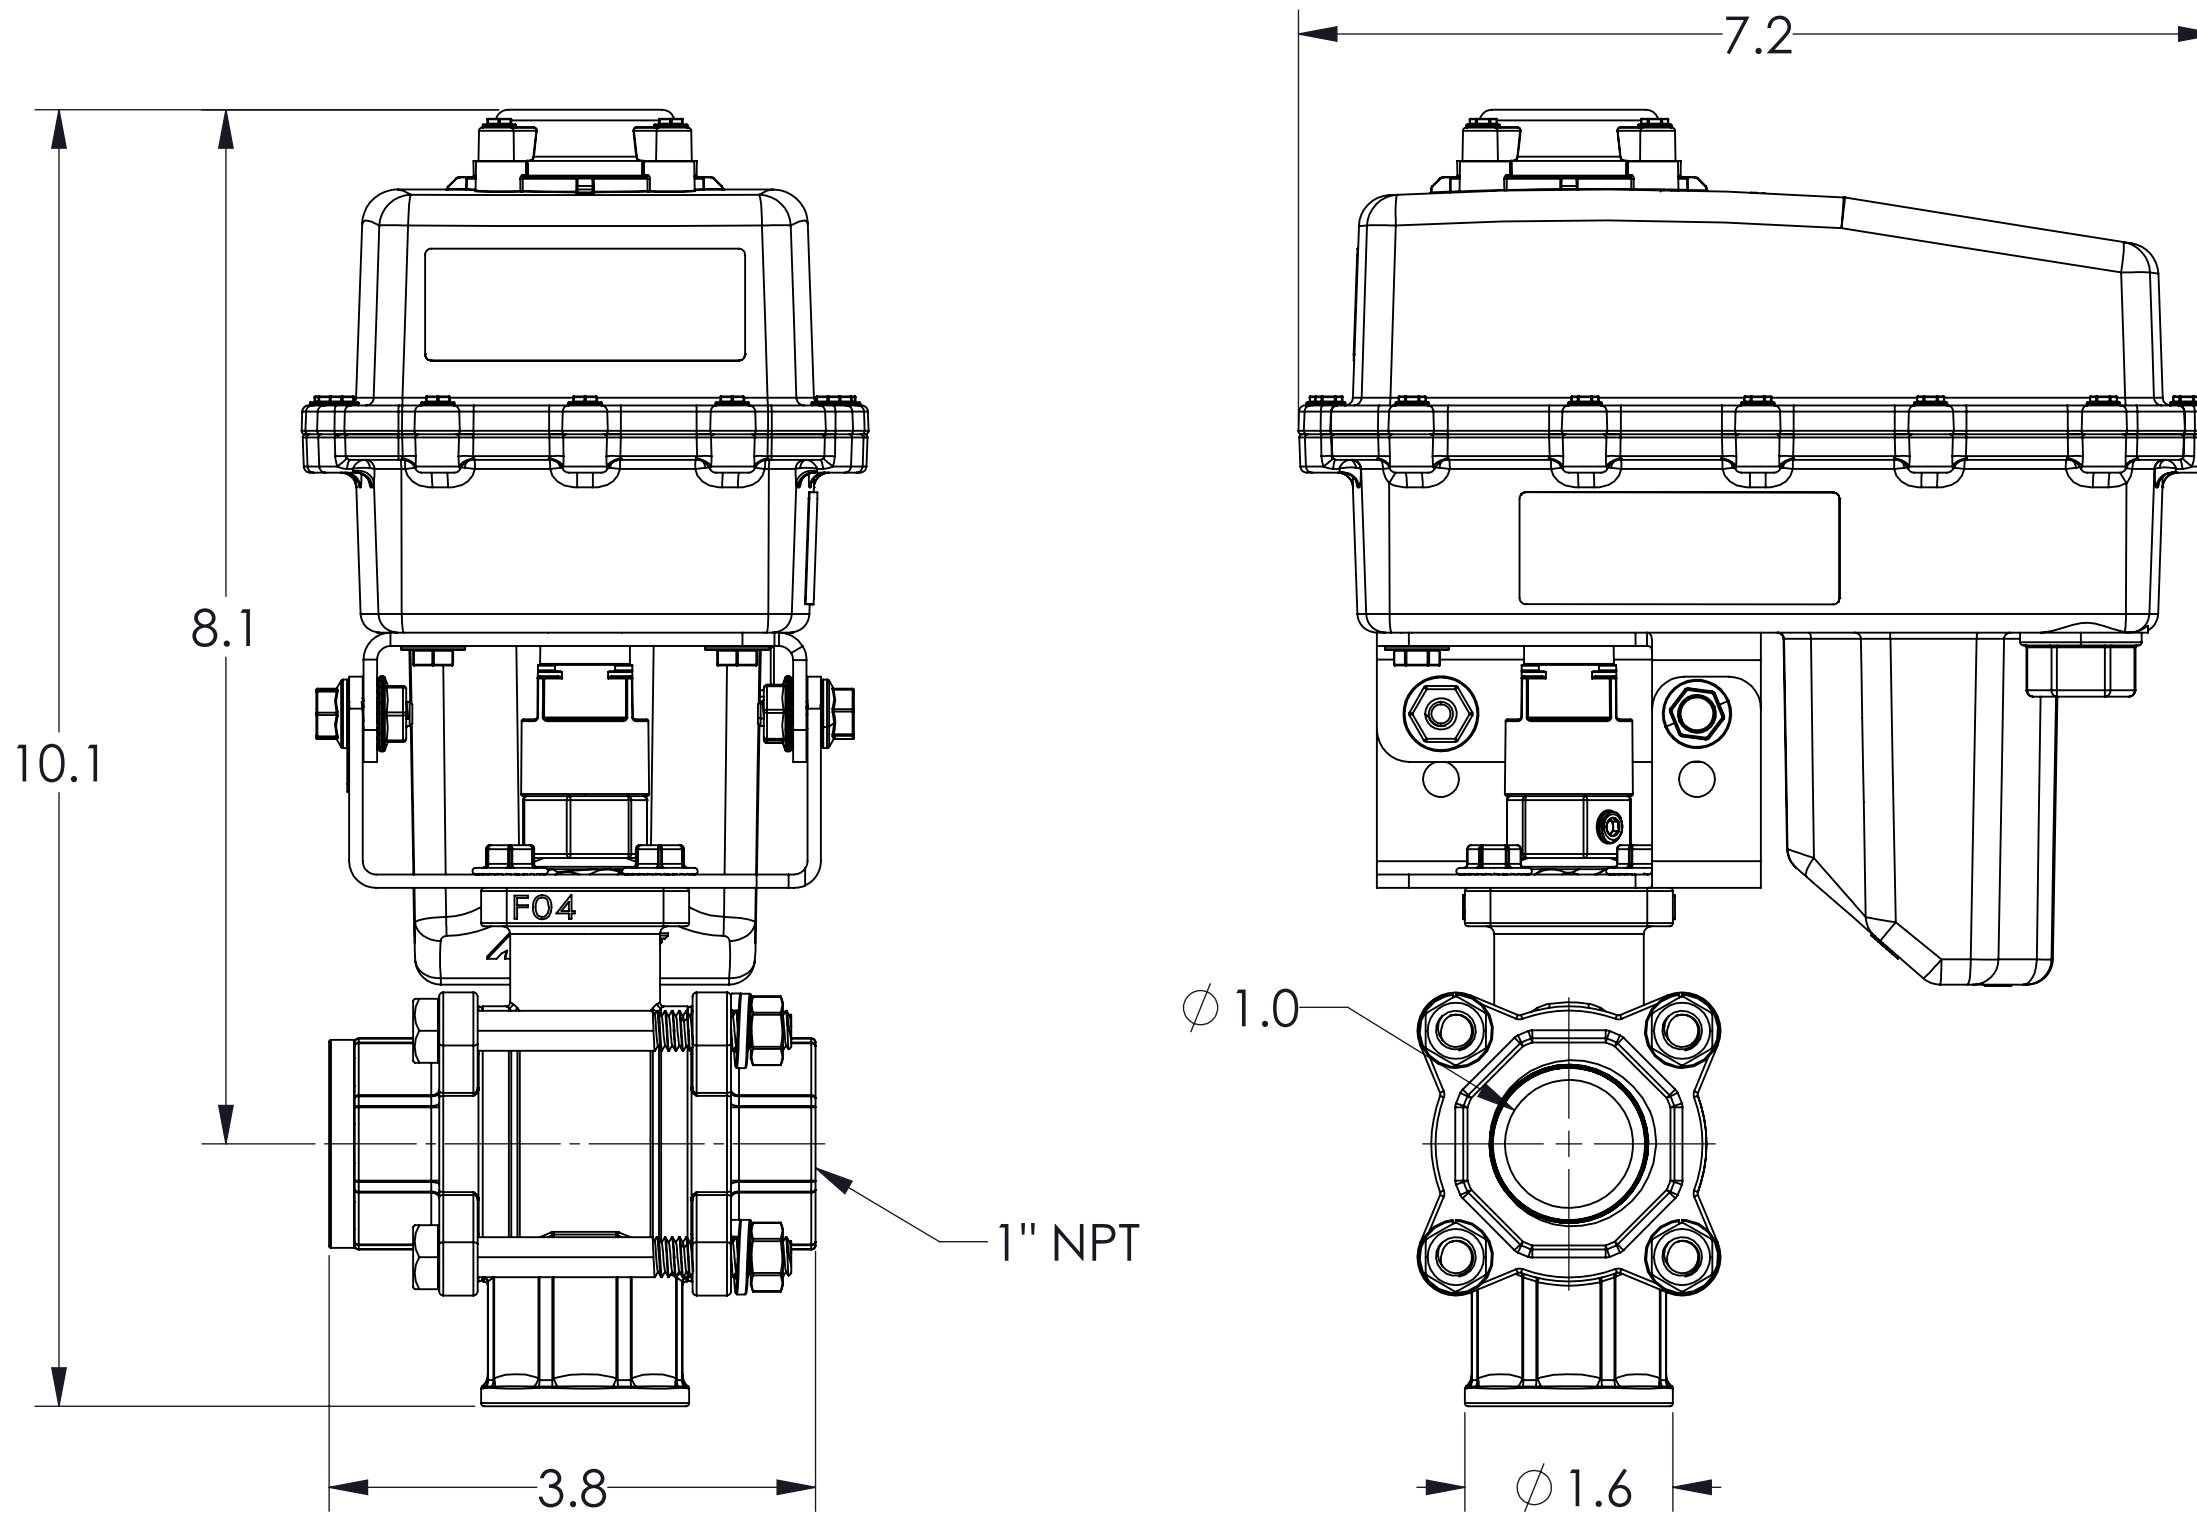

CONFORMS TO ASME STANDARDS Y14.5-2009

-STANDARD TOLERANCES-  
-ALL DIMENSIONS IN INCHES [mm]-

.X±0.1  
.XX±0.001  
.XXX±0.005  
.X°±1°

TOTAL RUNOUT: .005 FIM  
CORNER BREAK: .001/.010  
SURFACE FINISH: 125 µIN

DENSITY: 0.111 LBM/CU IN  
MASS: 5.826 LBM  
SURF AREA: 699.063 SQ IN  
VOLUME: 52.385 CU IN

DESIGNED BY: Jason Moran  
DRAWN BY: Jason Moran  
APPROVED:  
SCALE: 2:3  
SIZE: B  
MATERIAL: AS NOTED

**KZCO** inc.

23860 KZ PARKWAY  
GREENWOOD, NE 68366 USA  
PHONE: +1.402.944.2767  
FAX: +1.402.944.2402

TITLE: ACTUATED VALVE, EH22, 1" BL V-PORT, SS,  
7.5S@12/24VDC, 225DEG WP4T

PART NO: S6F22-20EWS-PFL

REV: 1

DRAWING NO: S6F22-20EWS-PFL

SHEET: 1 OF 2

4

3

2

1

B

B

A

A