

4


3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

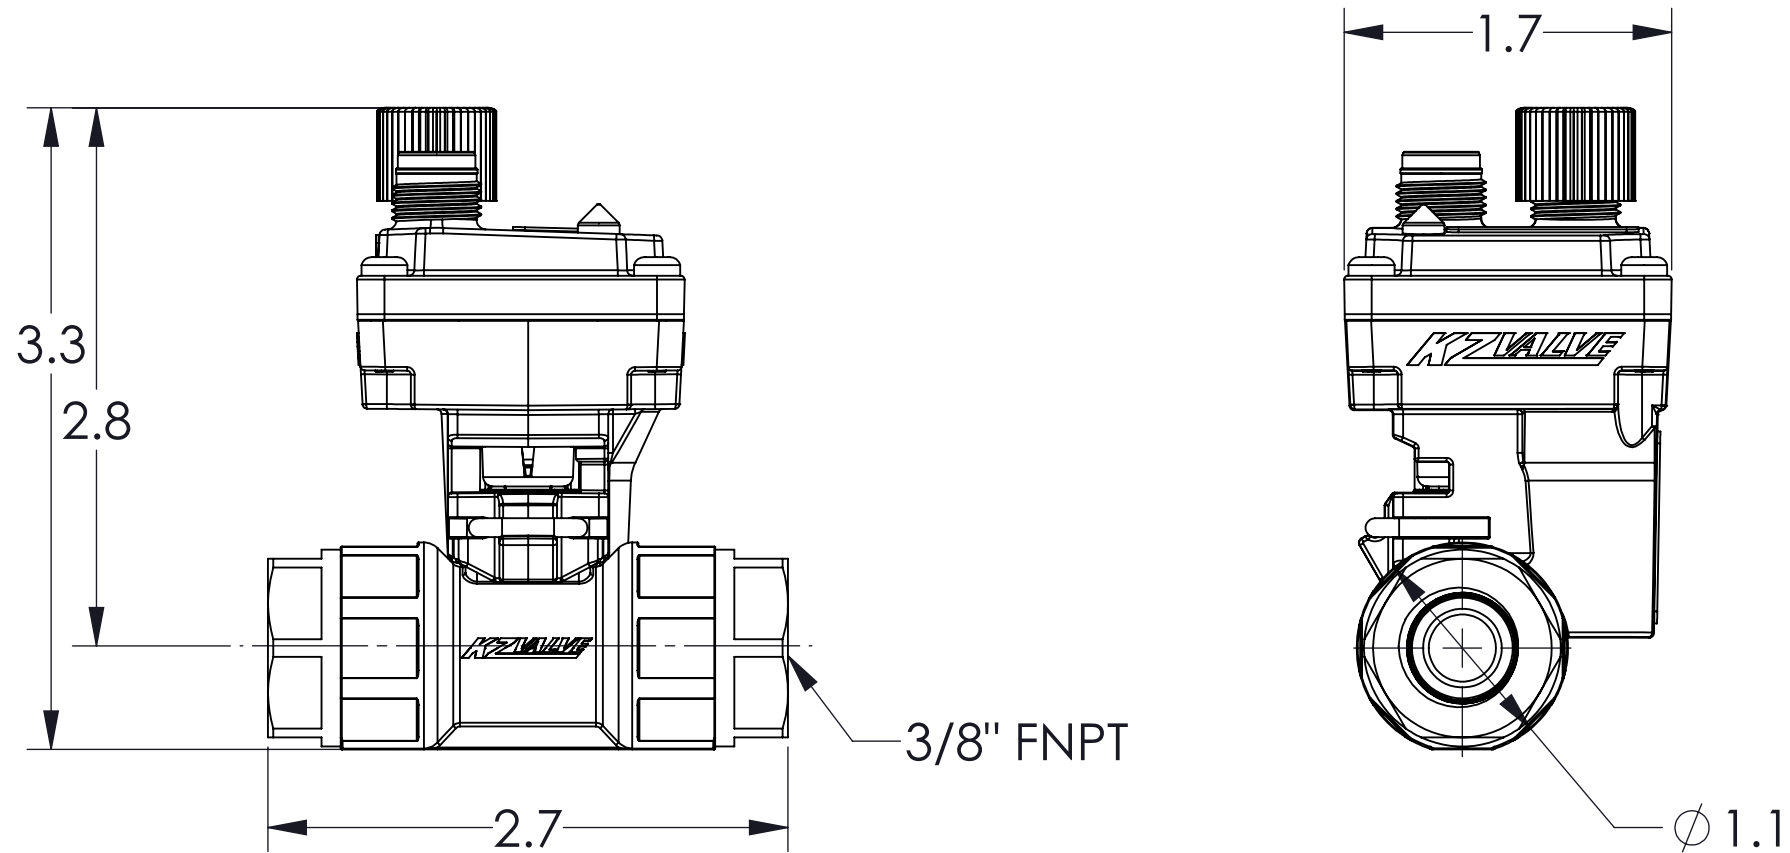

CONFORMS TO ASME STANDARDS Y14.5-2009

-STANDARD TOLERANCES- -ALL DIMENSIONS IN INCHES [mm]- .X±0.1 .XX±0.001 .XXX±0.005 .XX°±1°		DESIGNED BY: Tanner Buresh DRAWN BY: Tanner Buresh APPROVED: SCALE: 1:1 SIZE: B MATERIAL: AS NOTED	<p>23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402</p>
TOTAL RUNOUT: .005 FIM CORNER BREAK: .001 / .010 SURFACE FINISH: 125 µIN 		TITLE: ACTUATED VALVE, EH8, 3/8", SS 2-WAY, ON-OFF, 3/8" FNPT, VENTED, 0.2S@12VDC, FB(+@CLOSED, M12, LED PART NO: S8C28-1CDB0-R01 DRAWING NO: SALES_S8C28-1CDB0-R01	
DENSITY: 0.133 LBM/CU IN MASS: 0.559 LBM SURF AREA: 98.758 SQ IN VOLUME: 4.201 CU IN			REV: 1 SHEET: 1 OF 1

4

3

2

1

A

A

B

B