

4



3

2

1

CONFIDENTIAL AND PROPRIETARY TO KZCO, INC. UNAUTHORIZED USE, DISCLOSURE OF REPRODUCTION IS PROHIBITED

FOR MORE DETAILS AND INFORMATION, CONTACT: SALES@KZCO.COM

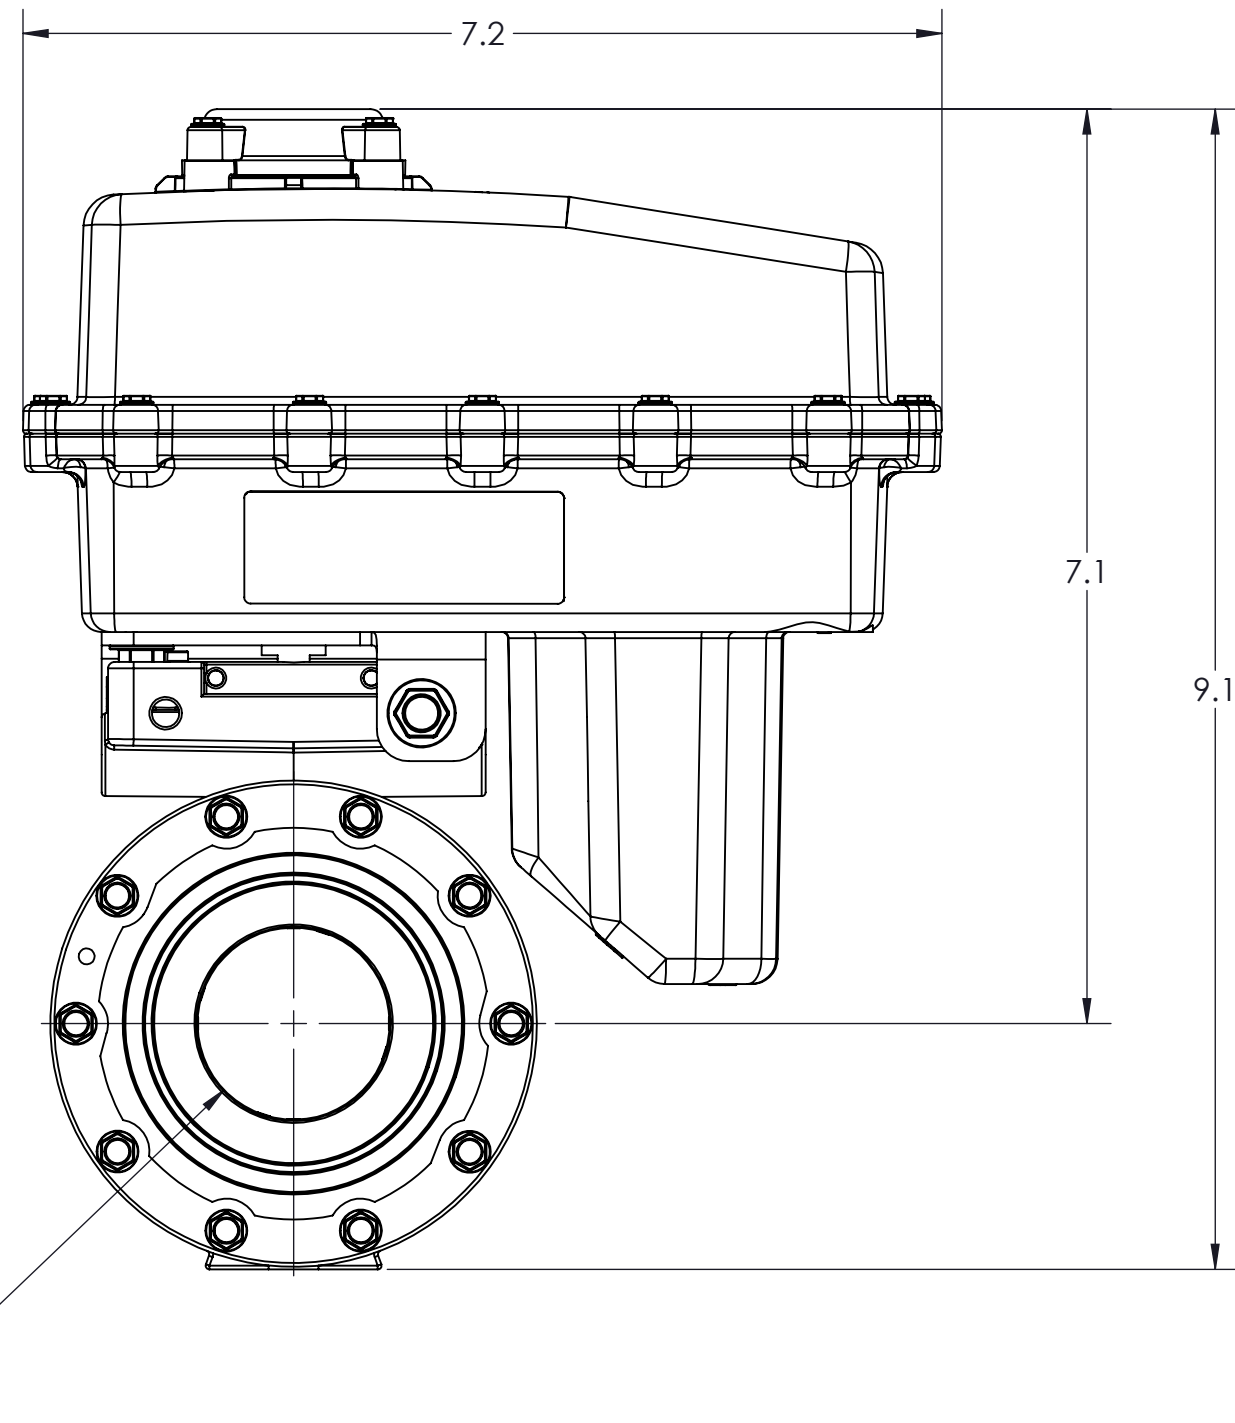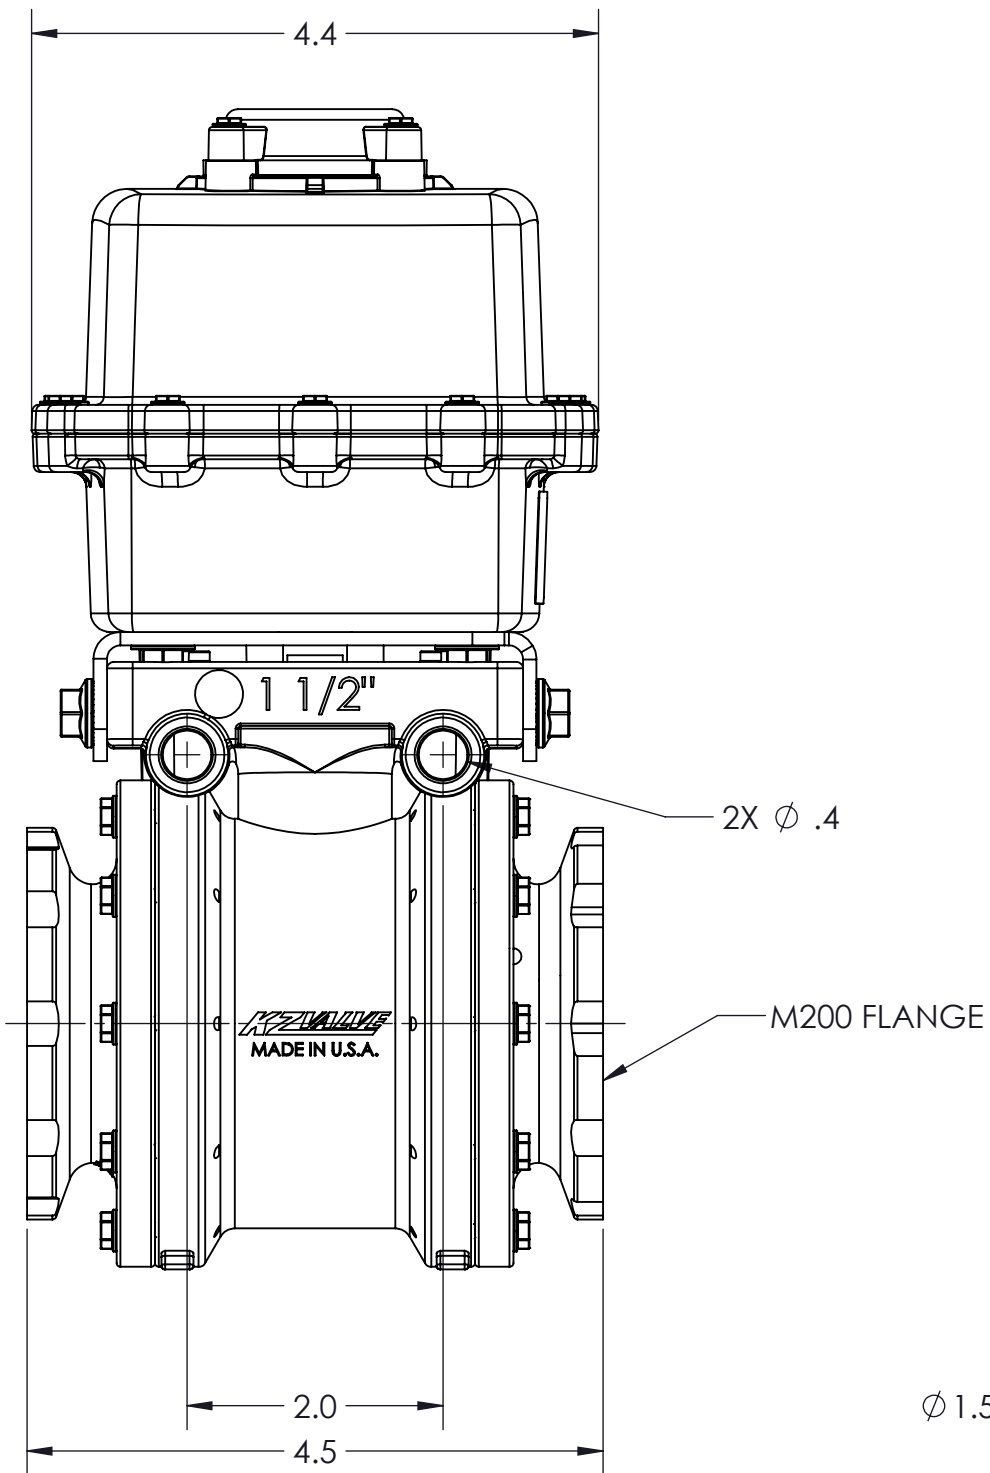

-STANDARD TOLERANCES-
-ALL DIMENSIONS IN INCHES [mm]-

.X \pm 0.1	TOTAL RUNOUT: .005 FIM CORNER BREAK: .001/.010 SURFACE FINISH: 125 μ IN
.XX \pm 0.01	
.XXX \pm 0.005	
.X $^{\circ}$ \pm 1 $^{\circ}$	
DENSITY: 0.066 LBM/CU IN MASS: 4.684 LBM SURF AREA: 816.627 SQ IN VOLUME: 71.040 CU IN	

DESIGNED BY: Jason Moran
DRAWN BY: Jason Moran
APPROVED:
SCALE: 2:3
SIZE: B
MATERIAL: Material <not specified>

		23860 KZ PARKWAY GREENWOOD, NE 68366 USA PHONE: +1.402.944.2767 FAX: +1.402.944.2402	
		TITLE: ACTUATED VALVE, EH22, MX6 1-1/2" 2-WAY, 1.5S@12VDC	
PART NO: -	REV: 1		
DRAWING NO: SALES_T2H22-10DY0-PF1	SHEET: 1 OF 2		

CONFORMS TO ASME STANDARDS Y14.5-2009

4

3

2

1